



DATA SHEET

HDMI® Audio Extractor with TOSLINK, SPDIF and 3.5mm – 4K 60Hz

Deliver audio to devices without HDMI inputs by extracting the digital audio embedded in an HDMI source

OVERVIEW

The HDMI Audio Extractor with TOSLINK, SPDIF and 3.5mm extracts the 5.1 audio from the HDMI input source and converts it into either a TOSLINK, S/PDIF, or 3.5mm Stereo audio signal. This device allows you to use separate speakers or an audio system with something that only has one HDMI output.

This HDMI Audio Extractor was designed to extract the digital audio that is embedded in HDMI source devices such as Apple TV®, Google Chromecast, gaming systems, and computers. The digital audio is then output to projectors or any other devices that do not provide an audio output and the system design calls for the use of an amplified audio reinforcement system. This extractor is easy to set up—simply connect the HDMI source to the extractor input, then connect the outputs to the display and amplifier or receiver.

This audio extractor supports HDMI video resolutions up to 4K at 60Hz, 3D formats up to 600 MHz, HDCP 2.2 and 1.4, and can toggle between 5.1CH, 2.0CH, or the toggle can be set to auto. The compact size and optional mounting ears allow the audio extractor to be mounted easily and conveniently for any installation.

Note: If the source device supports 2.0CH, then this product will output 2.0CH. If the source device supports 5.1CH, then this product will output 5.1CH only from the SPDIF port (under this condition, if the sink amplifier or receiver doesn't support 5.1CH, there may be no audio or low quality audio). If the source device supports 2.0CH and the toggling switch is set to 5.1CH, this product will only output 2.0CH

Chromecast is a trademark of Google LLC

FEATURES

- TOSLINK, SPDIF, and 3.5mm audio connections, to connect to any amplifier or receiver
- Supports HDMI resolutions up to 4K, for viewing your screen content at full HD
- HDCP 2.2 and 1.4 compliant, to create a secure connection between the source and display
- Supports uncompressed and compressed audio
- Toggle switch, which allows the extractor to be set to 5.1CH, 2.0CH or Auto

ITEM

C2G41003

DESCRIPTION

HDMI Audio Extractor with TOSLINK, SPDIF and 3.5mm – 4K 60Hz

SIGNAL SPECIFICATIONS

- Supports HDMI® Resolutions up to 4K 60Hz 4:4:4 18.0Gbps
- Supports 600MHz/6Gbps Per Channel (18Gbps All Channels) Bandwidth
- Supports Video Resolutions up to 12-Bit 4K (60Hz), 12-Bit 1080p (60Hz) or 12-Bit 720p/1080i (60Hz)
- Supports HDCP 2.2 and 1.4
- Supports 3D Formats up to 600MHz

ELECTRICAL SPECIFICATIONS


- Power Adapter: Electrical: Input: 100-240VAC, 50/60Hz, X.XA; Output: 5.0VDC, 1.0A
- Power Adapter: Mechanical: Dimensions: 64.59 x 39 x 33.68mm
- External Power Supply: Powered from DC Port
- Power Consumption (Max): 5W
- Plug Adapters: US+EU+UK Connector
- Efficiency Rating: VI

PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to 45°C
- Operating Humidity: 10% ~ 80%RH (Non-Condensing)
- Storage Temperature: -10°C to 80°C
- Storage Humidity: 5% ~ 90%RH (Non-Condensing)

PHYSICAL CHARACTERISTICS

- Housing: Metal (Iron Secc), Surface Treatment: Spray Paint, Color: Black
- Screw: Metal (Steel 1010A), ZN Plating, Color: Black
- DC Jack: Connector: DC5.2 x 2.1mm Female; Material, Pin Nickel Plating; Hood: Black
- HDMI Jack(s): Connector: A Female; Material, Gold Plated G/F with Nickel Base 50U"Min; Hood: Black
- TOSLINK Jack: Connector: Material, Plastic; Hood: Black
- 3.5mm Jack: Connector: Female; Material, Contact Piece: Cusn; Hood: Black
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

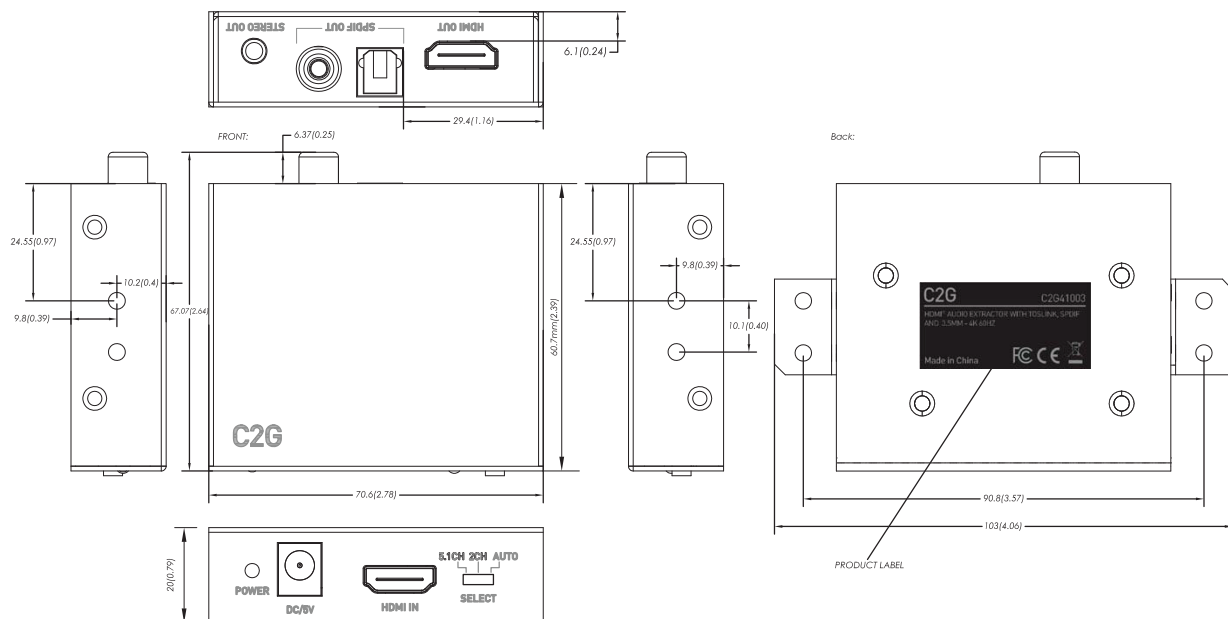

C2G®

c2g.com | legrandav.com

USA

800.CABL.911

E: trg@c2g.com

©2020 Legrand AV Inc. 200820 Rev A 11/20 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

A brand of **legrand®**

COMMERCIAL AV BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold