


CAT5 VGA DATA TRANSMITTER

**Broadcast Your Video Images And RS-232 Signals (T, R)
Over 110m/360ft**

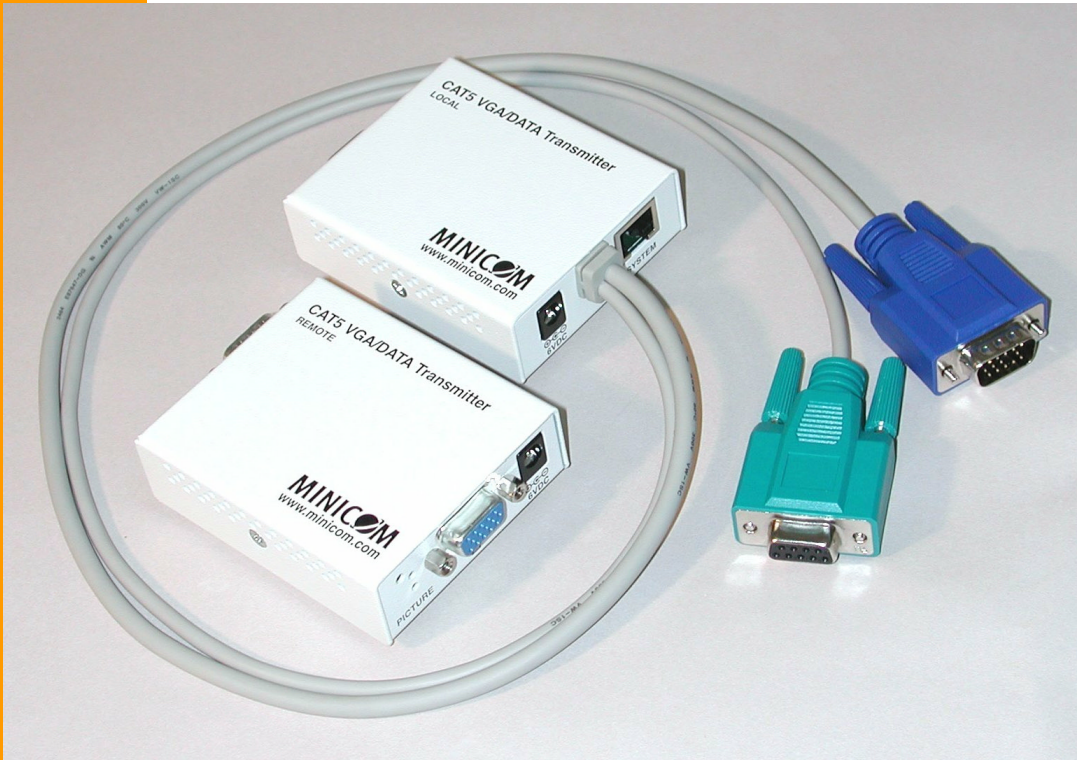

- Transmit high-resolution computer video and RS-232 signals over 110m/360ft
- Advanced CAT5 technology – low density cabling that is easy to install
- Bi-directional RS-232 for transmit/receive signals
- Supports high resolution video – 1600x1200 @ 75Hz
- Allows connecting a monitor at local unit
- Sturdy metal casing
- Built-in video and serial cabling
- **3 Year Warranty**

MINICOM

CAT5 VGA DATA TRANSMITTER

Broadcast Your Video Images And RS-232 Signals (T, R) Over 110m/360ft


The new CAT5 VGA Data Transmitter (VDT) is a one to one computer video and RS-232 signal extender. Use it to extend high resolution video images and RS-232 signals (T, R) over 110m/360ft via CAT5 cable. Users can now broadcast their video image or control a projector or any other RS-232 device at a remote location.

The VDT works using bi-directional RS-232 for transmit/receive signals. It also features thin CAT5 cabling which is extremely easy to install.

Quick Plug-and-Play Installation

The system is comprised of two units: one local and one remote. Both are made with sturdy metal casing. The local unit comes with built-in cabling and individual power supplies power each of the units. Broadcast the source screen at high video resolution – 1600x1200 @ 75Hz. The system also allows installing an additional monitor at the local unit. The VDT is available as a complete package including both local and remote units, two power supplies and quick user guide.

Application Diagram

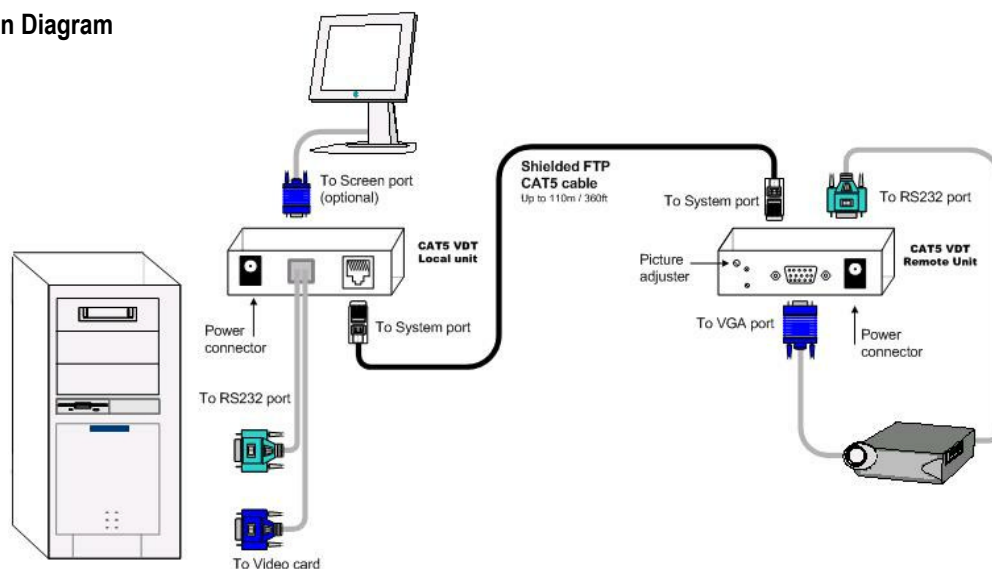

Specifications:

System	
Resolution	Up to 1600x1200 @ 75Hz
System Cable	CAT5 Shielded FTP Cable
Maximum Distance	110m/360ft
RS232 connection	Bi directional Transmit Receive Only
Shipping Weight	880g/1.94lb
Operating Temperature	Up to 50°C /148°F
Storage Temperature	-40°C to 70°C /-104 to 158°F
System Order Number	0VS23003
Warranty	3 Years
Local Unit:	
Cables / Connectors	VGA – HDD15 RS232 – DB9 VGA Out – HDD15
Power Consumption	External Power Adapter 6VDC
Dimensions	77.5x63x23mm/0.25x0.21x0.07ft
Weight	175g/0.39lb
Remote Unit:	
Cables / Connectors	VGA Out – HDD15 RS232 – DB9
Power Consumption	External Power Adapter 6VDC
Dimensions	77.5x63x23mm/0.25x0.21x0.07ft
Weight	155g/0.34lb



Website: www.minicom.com

INTERNATIONAL HQ
Jerusalem, Israel
Tel: +972 2 651 8593
Fax: +972 2 651 8971
minicom@minicom.com

NORTH AMERICAN HQ
Linden, NJ, USA
Tel: +1 908 486 2100
Fax: +1 908 486 7788
info.usa@minicom.com

GERMAN EUROPE
Zurich, Switzerland
Tel: +41 1 455 6220
Fax: +41 1 455 6225
info.german@minicom.com

ITALY
Rome, Italy
Tel: +39 06 8209 7902
Fax: +39 06 8209 7903
info.italy@minicom.com