



CAT5 AV Extender

Extend a plasma or display device up to 110m/360ft from its player

- Distribution to any type of display device over flexible CAT5 cable
- High resolution support (1200x1600@75Hz)
- Extend display up to 110m/360ft from the player/computer
- Out-of-band – frees network from heavy image transfer
- No player or computer needed at display end
- Optional 2 button control accessory via serial port
- 3 year warranty

The last step in digital signage

The ultimate out-of-band solution for the last step in a digital signage setup, the AV Extender is the quickest, most efficient way to move multimedia content from player to display.

Transmit audio/video from any type of player to multiple display devices


A one-to-one, player-to-plasma/LCD system for transmission of high quality audio and video, the AV Extender transmits rich multimedia from any type of player/computer to any type of electronic display device over standard shielded CAT5 cable.

Set up the display unit where it is most effective for your business

The AV Extender provides the flexibility you need for a customized digital signage installation, allowing you to position your display devices up to 110m/360ft from the player. Mount displays strategically in public view; keep the hardware needed to run multimedia content out of public reach.

Digital signage in your place of business for 1/3 the cost

The AV Extender is one of the more cost effective ways to get a digital signage system up and running in your place of business. The cost of plasmas with built in CPU can be prohibitive; using a dedicated, out-of-band system like the AV Extender can lower the cost of displays significantly.

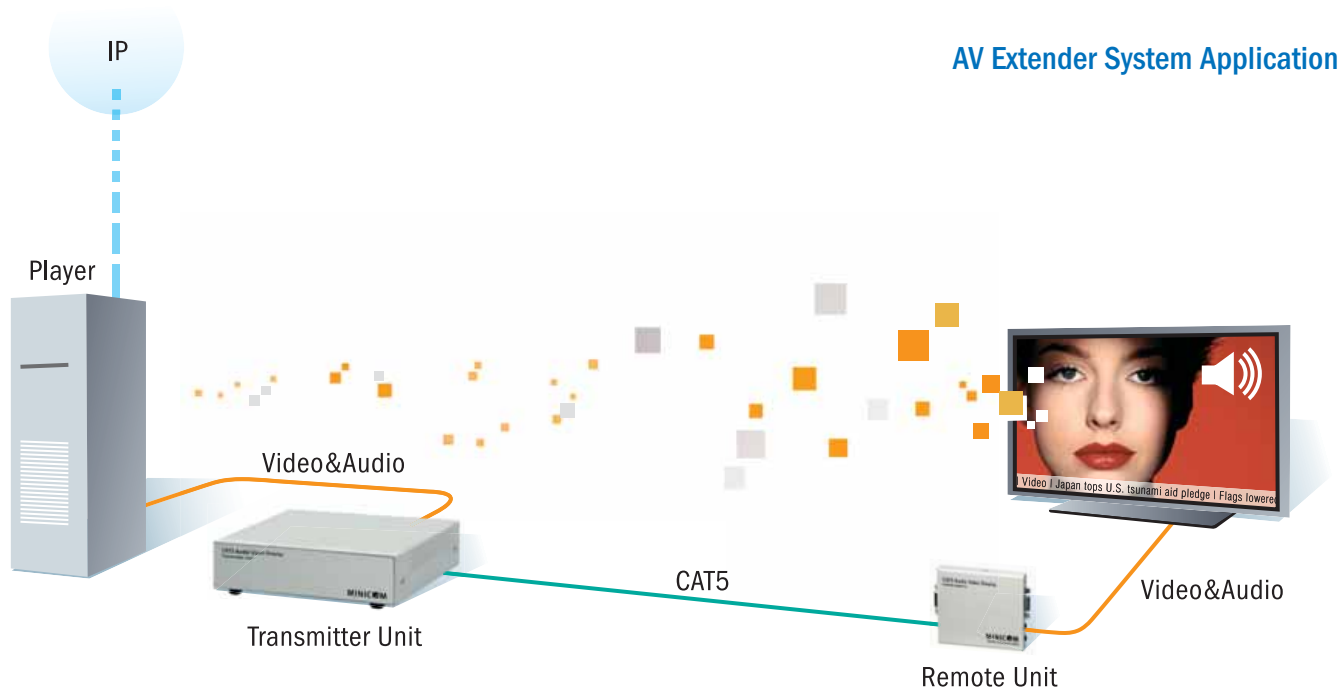

AV Extender System Application

Technical specifications

Resolution	Up to 1600x1200 @ 75Hz (depending on the cable length)
Input/Output	Analog signal red, green, blue 0.7v, p-p 75 Ohm
Sync	TTL compatible
Horizontal/Vertical Sync Polarity	Positive/Negative
System Cable	CAT5 Shielded FTP Cable 2 x 2 x 24 AWG
Maximum Distance	110m/360ft
Audio	Mono
Operating Temperature	5°C to 40°C / 41°F to 104°F
Storage Temperature	-40°C to 70°C / -104°F to 158°F
Warranty	3 Years

System	Transmitter	Power remote
Cables & Connectors	VGA In - HDD15M VGA Out - HDD15F System Out - RJ45 Mic/Headphone/Sc In/Out - Jack Control DB9 Controller - MiniDin8F	System In - RJ45 CPU VGA - HDD15M Screen - HDD15F Audio In/Out - Jack
Dimensions	150x96x42mm/ 5.9x3.7x1.6"	34x85x73mm/ 1.3x3.3x2.8"
Power	External Adaptor 12VDC 2A	External Adaptor 5 VDC
Order Number	OVS22037	



AV Extender Remote



AV Extender Transmitter

Additional Audio/Video Display Solutions:

- Video Display System
- Audio Video Display System
- VGA Data Transmitter
- RS 232 Extender



International HQ
Jerusalem, Israel
Tel: +972 2 535 9666
Fax: +972 2 535 9693
minicom@minicom.com

North American HQ
Linden, New Jersey, USA
Tel: +1 908 486 2100
Fax: +1 908 486 7788
info.usa@minicom.com

Europe
Dübendorf, Switzerland
Tel: +411 823 8000
Fax: +411 823 8005
info.europe@minicom.com

Italy
Rome, Italy
Tel: +39 06 82097902
Fax: +39 06 820 97 903
info.italy@minicom.com

Now everybody knows!

Authorized Reseller