

DATA SHEET



USB-C to HDMI[®] Adapter with USB-A and Power Delivery

Transmit data to a USB-C device while simultaneously charging the device

OVERVIEW

The USB-C to HDMI Adapter with USB-A and Power Delivery expands USB capabilities by providing HDMI, USB-C and USB-A ports for connecting peripherals to a single USB-C port. This hub connects to a USB-C or Thunderbolt 3 enabled laptop, tablet, or desktop computer and features USB-C power delivery, making it ideal for charging mobile devices or transferring data while in the office or on the road.

Convenience

Connect to this hub and display 4K HDMI audio/video content, while delivering power to ensure that a USB-C equipped laptop, tablet or smartphone is fully charged. Also transfer data with ease and speed, using the included USB-C or USB-A ports that are backward compatible with USB 2.0. Overall, this hub offers a lightweight, portable, and simple way to deliver video, transfer data, and stay charged up.

Performance

Deliver up to 100W of charging power to the connected device and transfer data up to 5Gbps when connected to the USB-C or USB-A ports. The HDMI port supports resolutions up to 4K at 30Hz, with a 10.2Gbps bandwidth.

FEATURES

- Supports resolutions up to 4K at 30hz, 10.2Gbps bandwidth
- One USB-A port supporting 5Gbps data transmission
- One USB-C port supporting 5Gbps data transmission or a max 100W power delivery
- Compatible with 3.1 USB-C and Thunderbolt™ 3 ports
- Reversible, symmetrical USB-C connector
- Small form factor for portability

ITEM DESCRIPTION

26915 USB-C to HDMI[®] Adapter with USB-A and Power Delivery

DATA SHEET

SPECIFICATIONS:

USB-C to HDMI® Adapter with USB-A and Power Delivery

ELECTRICAL SPECIFICATIONS:


- USB-C Power Delivery: 100W max
- 1.6A max output for 2 USB-A & 1 USB-C downstream ports when USB-C PD Power Adapter connected
- Max output depends on host when USB-C PD Power Adapter is not connected

PHYSICAL CHARACTERISTICS:

- Dimensions (HxWxL): 15.5mmH x 90mmW x 60mmL
(0.61 inch H x 3.54 inch W x 2.36 inch L)
- Cable Dimensions (HxWxL): 6.5mmH x 12.35mmW x 166mmL
(0.26 inch H x 0.49 inch W x 6.54 inch L)
- Certifications: FCC, CE

PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0°C to 45°C
- Storage Temperature: -10°C to 70°C
- Operating Humidity: 10% to 85% RH
- Storage Humidity: 5% to 90% RH

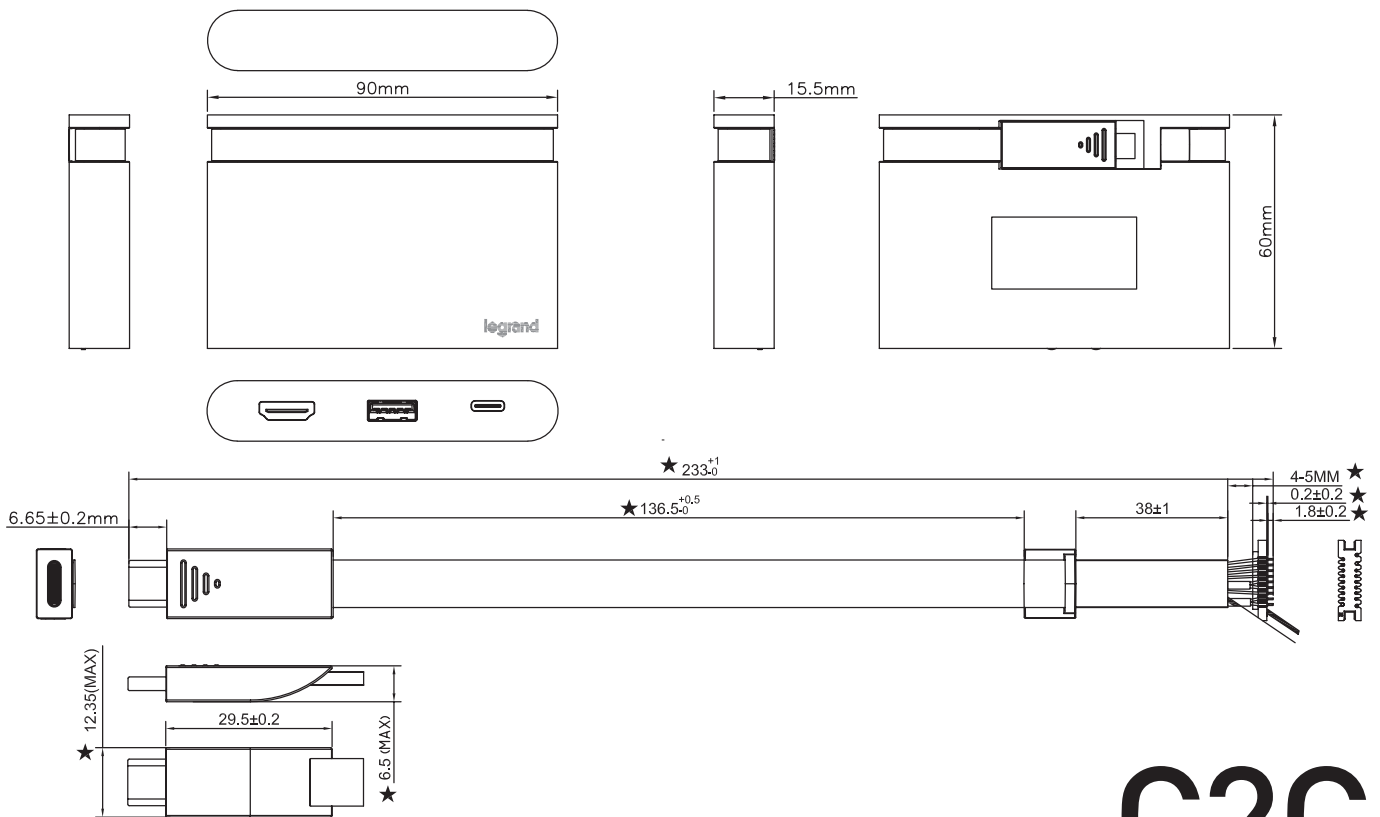

C2G
A brand of **legrand**

6500 Poe Avenue
Dayton, OH 45414
Phone: 800.CABL.911
www.c2g.com

Follow Us

