



DATA SHEET

4-Port USB-A 3.0 Hub - SuperSpeed USB 5Gbps

Add four SuperSpeed USB 3.0 ports to your computer and transfer data up to 5Gbps

OVERVIEW

The 4-Port USB-A 3.0 Hub expands the USB capabilities of a computer by providing four USB-A ports, so you can connect more peripherals and transfer data up to 5Gbps—ideal for supporting USB 3.0 cameras, keyboards, mice, flash storage drives, and other low-powered USB devices. Small, lightweight, and portable, the hub can easily fit on a desktop or be stored in a laptop case.

This hub is a perfect accessory for the Microsoft® Surface® Book 2, Chromebooks, and other leading laptops and tablets.

With a transfer rate of up to 5Gbps, it is fully backward compatible with older USB 2.0 and 1.1 devices. No need to worry about software or drivers to install, the plug-and-play feature makes it simple to just connect and start using right away.

FEATURES

- Four SuperSpeed USB 3.0 ports to add peripherals and transfer data up to 5Gbps
- Compact design reduces desktop clutter and makes it easy to travel
- Backward compatible with previous USB specifications and devices
- Plug-and-Play, just connect and use right away
- Perfect for laptops, Chromebooks, and the Microsoft® Surface® Book 2

ITEM	DESCRIPTION
------	-------------

C2G54461	4-Port USB-A 3.0 Hub - SuperSpeed USB 5Gbps
----------	---

SIGNAL SPECIFICATIONS

- Supports USB 3.0 Input; Four USB 3.0 Outputs
- Max 900mA per port (only one port is connected), Max 900mA for four ports when four ports are connected
- Supports USB 3.0 SuperSpeed (5Gbps) transmission, downward compatible with USB 2.0
- USB 3.0 port supports to charge and transmit data for the USB device simultaneously

ELECTRICAL SPECIFICATIONS


- Rating: Temp 80°C; Voltage 30V
- Conductor Resistance: At 20°C Max 34AWG: 860 OHMS/KM
- Insulation Resistance: 10M-KM Min at 20°C DC 500V (EIA-364-21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown (EIA-364-20)

PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to +45°C
- Operating Humidity: 10% to 85% RH (No Condensation)
- Storage Temperature: -10°C to +70°C
- Storage Humidity: 5% to 90% RH (No Condensation)

PHYSICAL CHARACTERISTICS

- USB-A Male: Insulation: Blue, Shell Nickel Plated
- USB-A Female: Insulation: Blue, Shell Nickel Plated
- USB-A Male Molding Material: Black PVC Conforms ROHS
- USB-A Female Molding Material: Black ABS Conforms ROHS
- Cable OD: 4.5mm
- Cable Bend Radius: 45mm
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2
- USB 2Product is CE Marked and Conforms to 2011/65/EU ROHS 2

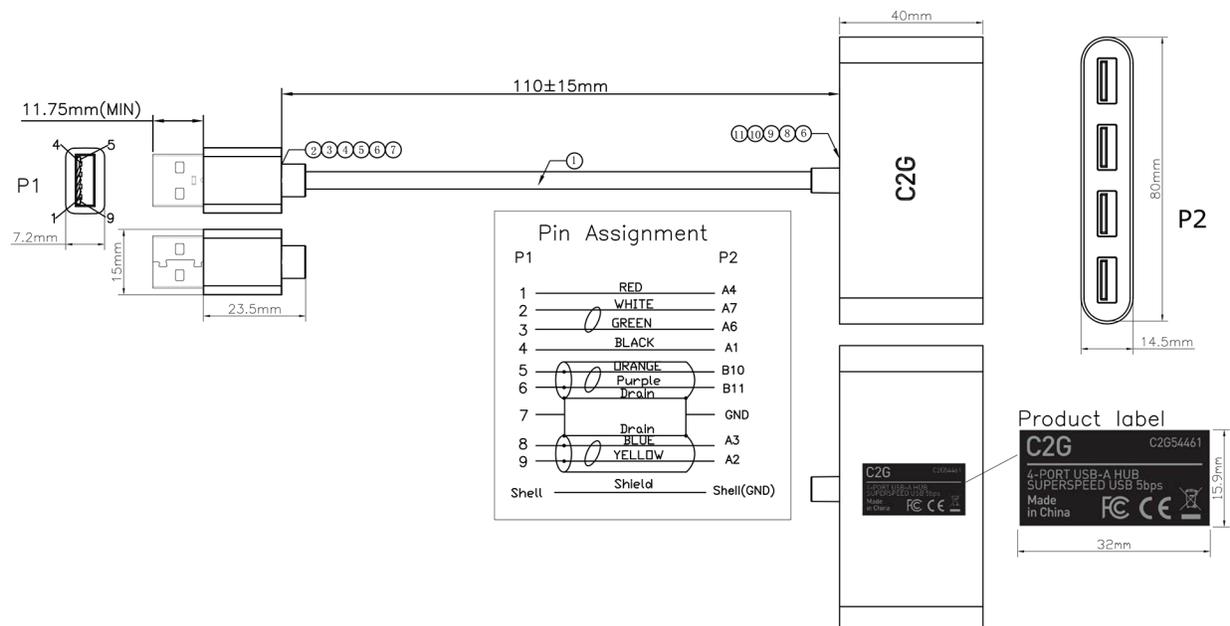

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wireltd

SIMPLIFIED CONNECTIVITY | c2g.com | legrandav.com

USA P 800.CABL.911 E trg@c2g.com