

USER GUIDE

USB 1.1 EXTENDER KEYSTONE INSERT-TRANSMITTER

Model: 29349

TABLE OF CONTENTS

Introduction.....	2
Features.....	3
Package Contents.....	4
Device Overview.....	5
Device Installation.....	6
Technical Specifications.....	8
Cables To Go One Year Warranty.....	9
Important Safety Information.....	10

INTRODUCTION

Thank you for purchasing the USB 1.1 Extender Keystone Insert (Transmitter). This device is designed to conquer USB length limitations and put your USB 1.1 devices where you want them. This solution extends the distance of a USB device to a host computer up to 150ft so you can place your USB projector, camera, printer, or any other USB device exactly where you want it! The USB Extender Keystone Insert is powerful yet simple, with no drivers to install or special software required. **We recommend that you read this manual thoroughly and retain for future reference.**

FEATURES


- ❖ Extends the functional distance of a USB signal, allowing a USB device to function with a USB-enabled computer up to 150ft away
- ❖ Ideal for use with USB projectors, interactive whiteboards, cameras, printers, web cams, hubs, or any other USB device
- ❖ Keystone fits standard keystone wall plates
- ❖ Bus-powered so no external power source is required
- ❖ Uses standard cat5/cat5E/cat6 patch cords (not included), allowing for easy use and flexibility
- ❖ Compliant with USB Specification 1.1

PACKAGE CONTENTS

- ❖ USB v1.1 Extender Keystone Insert-Transmitter
- ❖ User Guide

DEVICE OVERVIEW

1. RJ45 Ports
 - Cable interface to bridge this Transmitter and a receiving unit
2. USB Type B Male Connector
 - Connects to your computer's USB port
3. Blank Insert

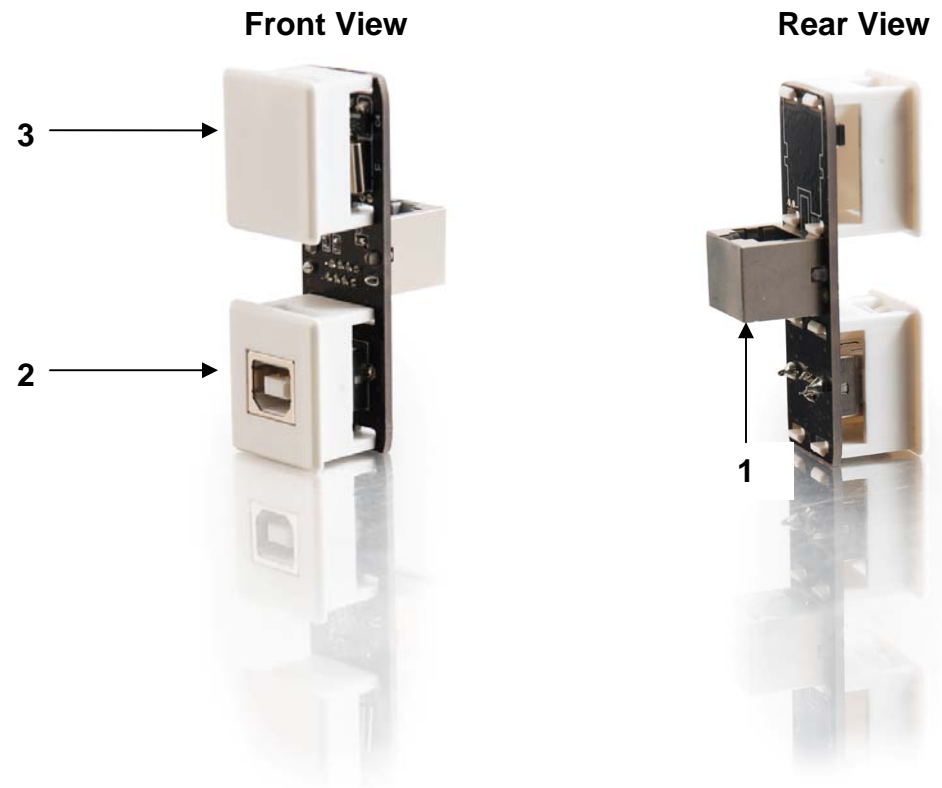

DEVICE INSTALLATION

Step 1

Install the USB Extender Keystone Insert in a Cables To Go or Quiktron wall plate, surface box, or any standard keystone and angled multimedia wall plate or patch panel.

Step 2

Install your USB SuperBooster/Extender receiver unit in the same manner as Step 1, if you are using the wall plate style receiver or if using the dongle style, you may position this where you your devices will be connected.

Step 3

Using a pre-terminated Cat5/Cat5e/Cat6 cable or terminate your own cable to connect the USB Extender Keystone Insert and your USB SuperBooster/Extender receiver unit.

Step 4

Plug your computer into the source end (USB Extender Keystone Insert end) using a standard USB A/B cable.

Step 5

Plug your USB enabled device/s into the receiver end (USB SuperBooster/Extender receiver unit end) using a standard USB A/B, A/mini-B or proprietary USB cable that came with your device.


Step 6

Turn your computer/source on and you can begin to use your USB devices.

DEVICE INSTALLATION

Note: We recommend using a solid 24AWG Cat5/Cat6 patch cable when connecting this transmitter with a receiver unit.

Example Application: (shown being used with Cables To Go 2-Port USB SuperBooster Wall Plate Receiver-#29345)

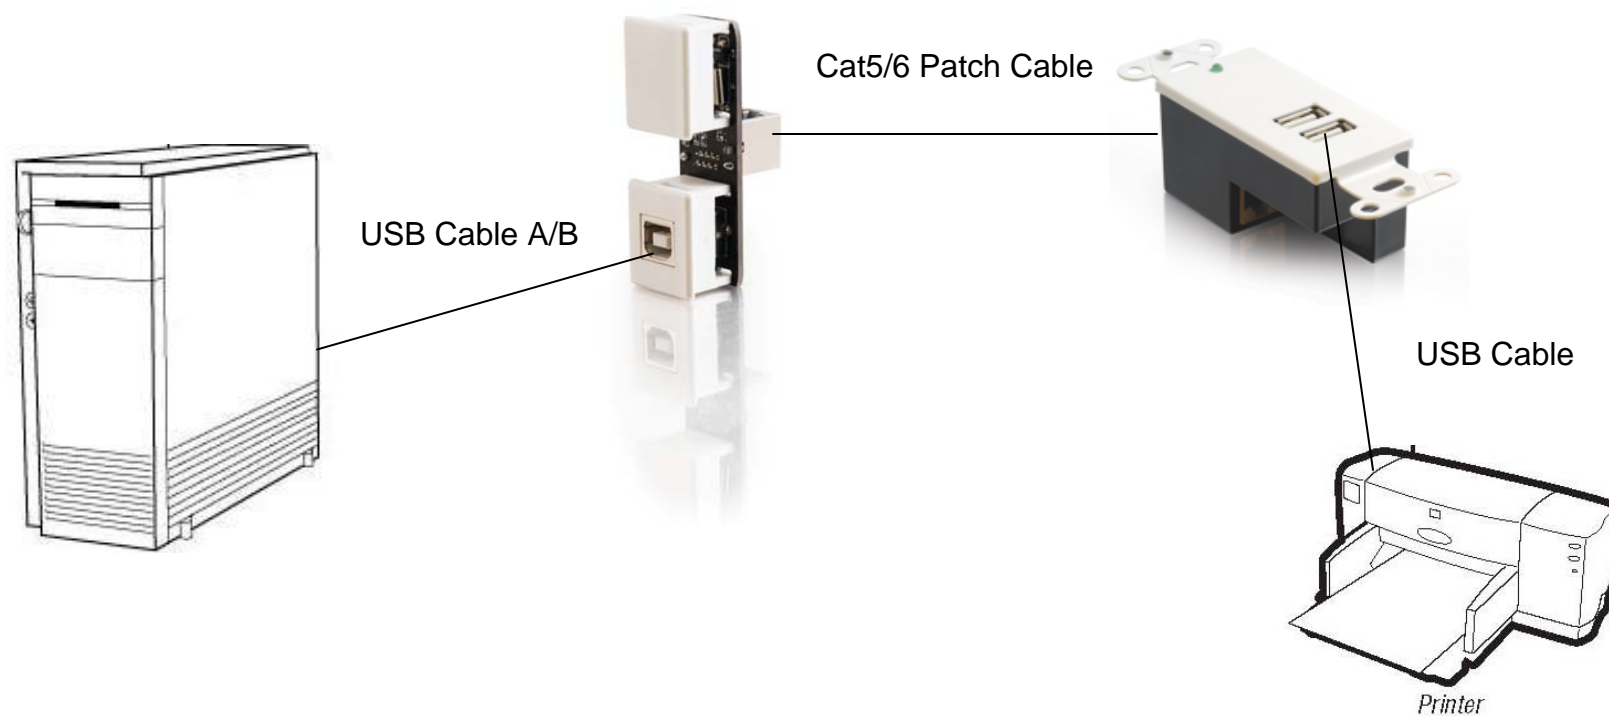

TECHNICAL SPECIFICATIONS

Product No.	29349
Complies USB Rev.	Ver. 1.1
Connectors	USB Type B female/ RJ45 female
Power Mode	Bus
Product Dimension	2.52 x .79 x 1.29 in.
Product Weight	.05 lbs
Product Color	White

CABLES TO GO™ ONE YEAR WARRANTY

At Cables To Go, we want you to be totally confident in your purchase. That is why we offer a one year warranty on this device. If you experience problems due to workmanship or material defect for the duration of this warranty, we will repair or replace this device. To request a Return Merchandise Authorization (RMA) number, contact customer service at 1-800-506-9606 or www.cablestogo.com.

Cables To Go
3555 Kettering Blvd.
Moraine, OH 45439
1-800-506-9607
www.cablestogo.com

IMPORTANT SAFETY INFORMATION

! Liquid:

If this unit or its corresponding power adapter has had liquid spilled on or in it, do not attempt to use the unit. Do not attempt to use this product in an outdoor environment as elements such as rain, snow, hail, etc. can damage the product.

! Avoid placing this product next to objects that produce heat such as portable heaters, space heaters, or heating ducts.

! THERE ARE NO USER SERVICEABLE PARTS

Do not attempt to open this product and expose the internal circuitry. If you feel that the product is defective, unplug the unit and refer to the warranty information section of this manual.

