

SPECIFICATION SHEET



Locking C19 to C20 Power Cords

- Locking C19 connector ensures port retention to critical equipment
- Constructed of heavy duty 15AWG conductors
- Rated up to 150V 15A
- CE rated, UL listed, TAA compliant
- Lifetime Warranty


Specifications: Locking C19 to C20 Power Cords

Electrical Specifications:

Voltage Rating:	300V
Amp Rating:	15A
Conductor:	33/0.254mm ± 0.002mm

Physical Specifications:

Overall Diameter:	8.8mm ±0.2mm
Average Insulation Thickness:	0.76mm
Operating Temperature:	-10~70°C; 50±20%RH
Storage Temperature:	-20~50°C; 50±20%RH
Certifications:	(UL) SJT E90165, ROHS, CE

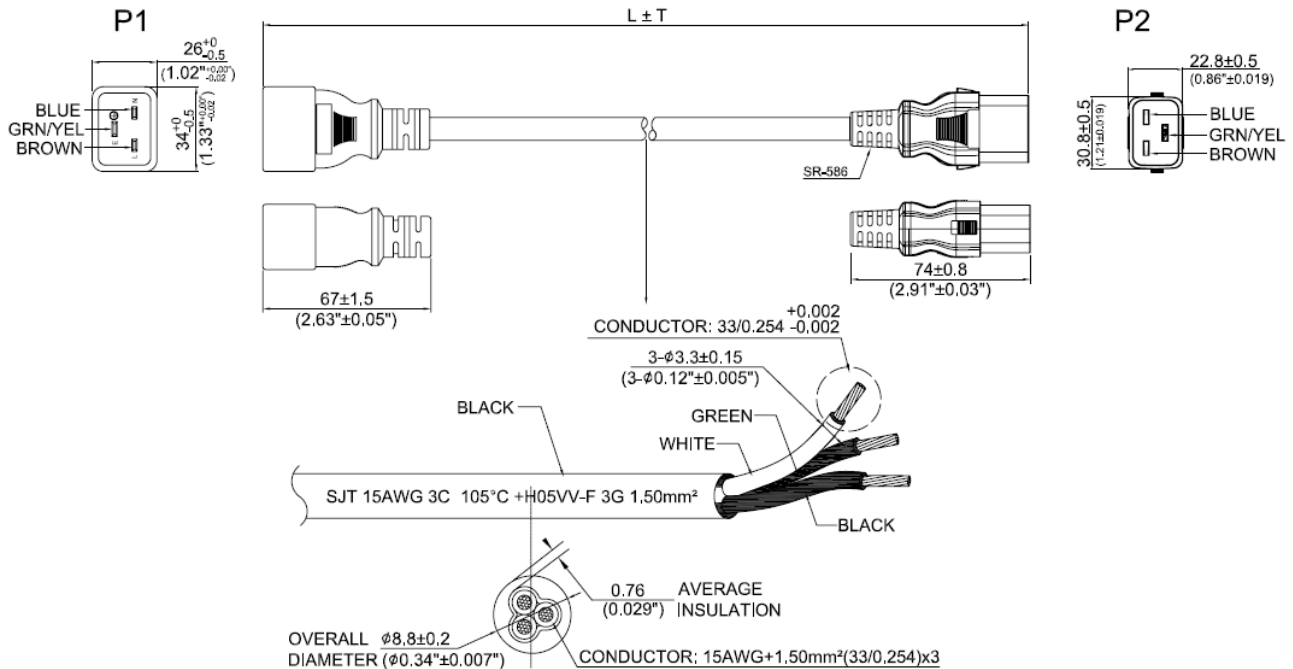

Part Number	Description	Weight (lbs)
10363	1ft Locking C19 to C20 15A 250V Power Cord	.255
10364	2ft Locking C19 to C20 15A 250V Power Cord	.291
10365	3ft Locking C19 to C20 15A 250V Power Cord	.330
10366	6ft Locking C19 to C20 15A 250V Power Cord	.727
10367	10ft Locking C19 to C20 15A 250V Power Cord	1.146
10368	15ft Locking C19 to C20 15A 250V Power Cord	1.874



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

