



PASS & SEYMOUR® UL Hospital Grade USB Chargers 15 & 20A, 125V

Charge ahead with the UL Hospital Grade USB duplex receptacle.

Pass & Seymour® Hospital Grade Tamper-Resistant Duplex Receptacles with USB Charging capabilities are designed with strength and durability in mind. They were designed for the healthcare market, and are capable of withstanding heavy use due to their UL Hospital Grade certification. This product features an improved overall 3.1A USB charging capability, auto-ground clips, zinc-plated ground terminal screw, as well as triple-wipe brass contacts for lasting retention. The screw-pressure-plate back wiring makes installation fast and easy.



FEATURES & BENEFITS

Overall 3.1A USB charging capability

Combination AC duplex receptacles include two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices

AC receptacles available in 15 and 20 Amp, 125V

AC receptacles are tamper-resistant as standard - patented shutter system prevents improper insertion of foreign objects



Multiple color options available.

Back and side wire terminals accommodate #14 AWG - #10 AWG stranded and solid copper wire.

Stainless steel auto-ground clips assure positive ground

FIELD USES/VERTICAL MARKETS

■ Healthcare

■ Education

■ Institutional




PASS & SEYMOUR®

UL Hospital Grade USB Chargers

15 & 20A, 125V

ORDERING INFORMATION

| Part Number | Rating A | V | Color | NEMA Configuration No. | Included in Kits |
|--|-------------|------|-------|---------------------------|------------------|
| Duplex Tamper-Resistant Receptacle with USB Charger | | | | | |
| 12823 | 20A | 125V | White | 5-20R | 12838, 12855 |
| 12822 | 20A | 125V | Ivory | 5-20R | 12837, 12854 |



TECHNICAL SPECIFICATIONS

3rd Party Compliance

cULus Listed, UL Fed Spec Listed
Complies with test requirements UL 498, UL 1310, Fed Spec WC596, CSA C22.2 No. 42, CSA C22.2 No. 223

Performance

Electrical


| | |
|------------------------------|--|
| Dielectric Withstand Voltage | Withstands 1500V minimum |
| Maximum Working Voltage | 125V |
| Current Interrupting | Certified for current interrupting at full-rated current (receptacle only) |

Mechanical

| | |
|-------------------------|--|
| Terminal Identification | Terminal Identification in accordance with UL 498 (Brass, White, Green) |
| Terminal Accommodation | Back and side wire terminals accommodate #14 AWG - #10 AWG stranded and solid copper wire. |
| Product Identification | Ratings are permanent part of the device |

Environmental

| | |
|-----------------------|---|
| Flammability | UL94 V2 (for device cover) 5V (for device body and frame) |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C without impact |

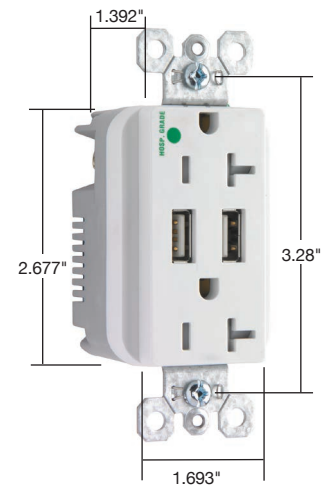

Materials

| | |
|------------------|--|
| Face | Polycarbonate |
| Body | Nylon |
| Contacts | CDA 260 Brass |
| Mounting Strap | .046" Zinc-Plated Steel |
| Terminal Screws | Tri-Drive Zinc-Plated Steel with Either Clear or Black Chromate For Color Identification |
| Ground Screw | Tri-Drive Steel with Green Chromate |
| Mounting Screws | Tri-Drive Steel |
| Auto-Ground Clip | Stainless Steel |

Warranty

1 Year



Legrand, North America
3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.506.9607
www.c2g.com

Follow Us

