

Plugmold® Raceway & Multioutlet Assemblies

Plugmold Multioutlet Systems are available in a wide variety of lengths and fittings and in a variety of finishes to provide versatile solutions for many applications. Plugmold options include single or alternating circuits, standard or isolated ground receptacles, GFCI protection, tamper-resistant protection, USB charging, Snapicoil® harnesses of prewired receptacles, and cord-ended units.

Plugmold Multioutlet Systems are available in black or ivory ScuffCoat™ finish, painted white or gray enamel steel, stylish stainless steel, anodized aluminum and durable textured ivory nonmetallic. The painted steel product works with many types of decor and is paintable to integrate with most color schemes. Durable stainless steel and anodized aluminum Plugmold products are corrosion-resistant, making them ideal for labs.



Plugmold systems are available in a variety of colors and configurations.

FEATURES & BENEFITS

- **Compact, low profile appearance.** Enhanced aesthetics and ideal for installations within minimal spaces.
- **Multiple finishes.** Choose from black or ivory ScuffCoat, white or gray painted enamel or durable stainless steel finishes.
- **USB 2.0 & 3.0 compatible charging.** Dual-port charging modules share 2.4 amps of charging capacity and can charge multiple phones, tablets or other mobile devices at the same time.
- **GFCI protection.**
- **Tamper-resistance protection.** Prevents the accidental insertion of foreign objects into receptacles reducing the risk of shocks or electrocution. Meets 2014 NEC section 406 requirements.
- **Single, alternating circuit, and isolated ground wiring options available.** Wiring options to meet virtually any job or environment requirement.
- **Variety of lengths.** Installed power and USB charging in multiple lengths to meet space and location requirements.
- **Full range of fittings.** Provide flexibility for multiple installation options or integrations with 2400 Series Raceway systems.
- **Receptacle spacing options.** Select the right configuration for your application.
- **cULus Listed.** Safety and reliability in the applications.



Plugmold Multioutlet systems shown in typical applications.

Steel Plugmold Multioutlet Systems

Steel Plugmold Multioutlet Systems are available in a wide range of lengths and finishes to provide a versatile solution for many applications. Options include versions with single or alternating circuits, standard, or isolated ground receptacles, Snapicoil® harnesses of prewired receptacles, USB charging options, GFCI protection, tamper-resistance, plug-in and cord-ended units.

Steel Plugmold Multioutlet Systems are available in black or ivory ScuffCoat™ finish, painted white or gray enamel finish, or stylish stainless steel. The enamel finishes work with many types of decor or can be painted to blend with most color schemes. Stainless steel Plugmold raceway is both durable and aesthetically pleasing.




Steel Plugmold systems are available in a variety of colors and configurations.


PLUGMOLD 2000 SERIES WIRE FILL CAPACITIES FOR POWER				
CABLE TYPE	WIRE SIZE THHN/THWN	O.D.		WIRE CROSS-SECTIONAL AREA
		Inches	(mm)	
POWER WIRING WITHOUT DEVICES	10 AWG	0.166	4.2	—
	12 AWG	0.130	3.3	7*
	14 AWG	0.111	2.8	7*
POWER WIRING WITH DEVICES (Plugmold Series)	8 AWG	0.218	5.5	—
	10 AWG	0.153	3.9	—
	12 AWG	0.122	3.1	5**
	14 AWG	0.105	2.7	5**



*Wire capacity limited to maximum of seven conductors due to .025" [.6mm] material thickness of cover.
 **Including one hot, neutral, and ground wire from the receptacle.

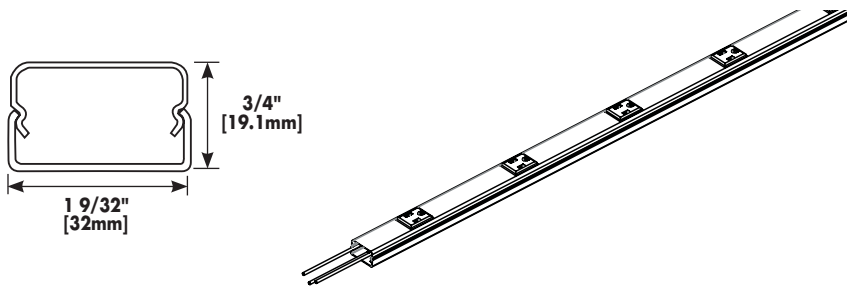

PLUGMOLD 2000 SERIES WIRING CONFIGURATIONS





GB Series:

3-wire, #12 THHN (1 hot, 1 neutral and 1 ground), 1 circuit; has insulated grounding conductor.

PLUGMOLD MULTIOUTLET SYSTEMS QUICK SELECTION GUIDE							
FABRICATION	PROFILE	FINISH OPTIONS	LENGTHS	WIRING CONFIGS.	OUTLET OPTIONS		OPTIONS
					O.C. SPACING	QUANTITY	
STEEL	2000 Series	Black Scuffcoat Ivory Scuffcoat Gray Enamel White Enamel Stainless Steel	2' (610mm) * 3' (910mm) 5' (1.5m) 6' (1.8m)	GB GB/USB GBA IG	6" (152mm) 9" (152mm) 12" (152mm) 18" (152mm) 24" (152mm)	4 Single 5 Single 6 Single 8 Single 10 Single 12 Single 3 Duplex 4 Duplex 5 Duplex 6 Duplex	- Hard-Wired models - Cord-Ended models - USB Charging models - Plug-In model - GFCI Protection - Tamper-Resistant

USB PLUGMOLD

Available in 3' [914mm], 5' [1.5m] and 6' [1.8m] lengths with 6" [152mm] receptacle spacing. 15A tamper-resistant receptacles. 3-wire, #12 THHN (1 hot, 1 neutral, and insulated ground conductor). .040" [1.0mm] steel housing. Packed 2 per carton. Each unit supplied with one (1) Coupling and two (2) Blank End Fittings. USB is 2.4 (shared between 2 ports) 5VDC.





PLUGMOLD 2000 SERIES WIRE FILL CAPACITIES FOR POWER

PART NO.	FINISH	LENGTH		WIRING CONFIG.	LENGTH		OUTLETS QUANTITY & TYPE
		feet	(mm)		Inches	(mm)	
16224	White	3'	(915mm)	GB	6"	(152mm)	1 USB, 5 Single 15A
16220	Black	3'	(915mm)	GB	6"	(152mm)	1 USB, 5 Single 15A
16222	Ivory	3'	(915mm)	GB	6"	(152mm)	1 USB, 5 Single 15A
16225	White	5'	(1.5m)	GB	6"	(152mm)	1 USB, 9 Single 15A
16221	Black	5'	(1.5m)	GB	6"	(152mm)	1 USB, 9 Single 15A
16223	Ivory	5'	(1.5m)	GB	6"	(152mm)	1 USB, 9 Single 15A

ALL USB PLUGMOLD

Available in 3' [914mm], and 5' [1.5m] lengths with 12" spacing. USB is 2.4 Amps (shared between two ports) 5VDC. .040" [1.0mm] steel housing. Packed two per carton. Each unit supplied with one (1) Coupling and two (2) Blank End Fittings. Each USB module provides 2 ports with 2.4 Amps of shared charging. Please note the charging load on one module will not affect the charging performance of the other USB modules in the product.





PLUGMOLD 2000 SERIES WIRE FILL CAPACITIES FOR POWER

PART NO.	FINISH	LENGTH		WIRING CONFIG.	LENGTH		OUTLETS QUANTITY & TYPE
		feet	(mm)		Inches	(mm)	
16214	Black	3'	(915mm)	USB	12"	(305mm)	3 USB Modules
16215	Black	5'	(1.5m)	USB	12"	(305mm)	5 USB Modules
16216	Ivory	5'	(915mm)	USB	12"	(305mm)	3 USB Modules
16217	Ivory	5'	(915mm)	USB	12"	(305mm)	5 USB Modules
16218	White	5'	(915mm)	USB	12"	(305mm)	3 USB Modules
16219	White	5'	(915mm)	USB	12"	(305mm)	5 USB Modules

ALTERNATING USB PLUGMOLD

Available in 5' [1.5m] length with 9" spacing. 15A tamper-resistant receptacles. 3-wire, #12 THHN (1 hot, 1 neutral and insulated ground conductor). .040" [1.0 mm] steel housing. Packed two per carton. Each unit supplied with one (1) Coupling and two (2) Blank End Fittings. USB is 2.4 Amps (shared between two ports) 5VDC. Please note the charging load on one module will not affect the charging performance of the other USB modules in the product.



PLUGMOLD 2000 SERIES WIRE FILL CAPACITIES FOR POWER

PART NO.	FINISH	LENGTH		WIRING CONFIG.	LENGTH		OUTLETS QUANTITY & TYPE
		feet	(mm)		Inches	(mm)	
16226	Black	5'	(1.5m)	GB/USB	9"	(229mm)	3 Outlets/3USB Modules
16227	Ivory	5'	(1.5m)	GB/USB	9"	(229mm)	3 Outlets/3USB Modules
16228	White	5'	(1.5m)	GB/USB	9"	(229mm)	3 Outlets/3USB Modules

C2G & WIREMOLD PART NUMBER CONVERSION CHART

C2G Part Number	Wiremold Part Number	Item Description: Plugmold Multioutlet Systems
16214	BK20USB312	Black with 3 USB Modules - 3ft
16215	BK20USB512	Black with 5 USB Modules - 5ft
16216	V20USB312	Ivory with 3 USB Modules - 3ft
16217	V20USB512	Ivory with 5 USB Modules - 5ft
16218	WH20USB312	White with 3 USB Modules - 3ft
16219	WH20USB512	White with 5 USB Modules - 5ft
16220	BK20GB306TRUSB	Black with 1 USB Module, 5 Single Outlets 15A -3ft
16221	BK20GB506TRUSB	Black with 1 USB module, 9 Single Outlets 15A -5ft
16222	V20GB306TRUSB	Ivory with 1 USB Module, 5 Single Outlets 15A - 3ft
16223	V20GB506TRUSB	Ivory with 1 USB Module, 9 Single Outlets 15A - 5ft
16224	WH20GB306TRUSB	White with 1 USB Module, 5 Single Outlets 15A - 3ft
16225	WH20GB506TRUSB	White with 1 USB Module, 9 Single Outlets 15A - 5ft
16226	BK20GB509TRUSBA	Black with 3 Outlets / 3 USB Modules - 5ft
16227	V20GB509TRUSBA	Ivory with 3 Outlets / 3 USB Modules - 5ft
16228	WH20GB509TRUSBA	White with 3 Outlets / 3 USB Modules - 5ft



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

