

SPECIFICATION SHEET



Slim AUX 3.5mm Audio Cable M/M

- Designed to connect to a portable device while in a protective case
- Strain relief to prevent damage to the cable
- Foil wrap shielding protects against EMI/RFI
- Lifetime Warranty



Specifications: Slim AUX 3.5mm Audio Cable M/M

Electrical Specifications:

Nominal Impedance:	10MΩ
Insulation Resistance:	300V DC

Physical Specifications:

Conductor Type:	28AWG (7/0.127 TC), x2
Insulation:	SR-PVC, ID:0.85 Black x1, Red x1
Drain Wire:	26AWG (7/0.16TC)
Shield:	Al Foil Wrap
Connector:	3.5mm Stereo Plug, Nickle Plated x2
Jacket:	Black PVC (Pantone/#Black 6C)
Approvals:	CE, RoHS

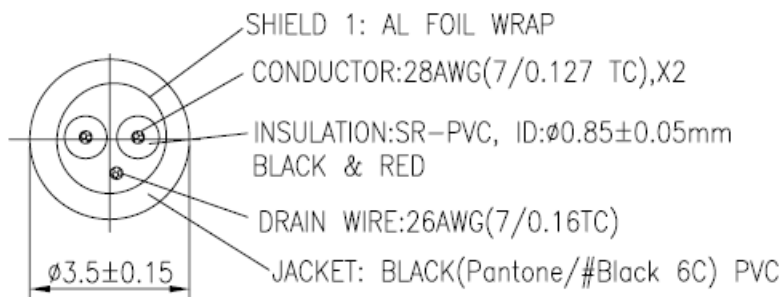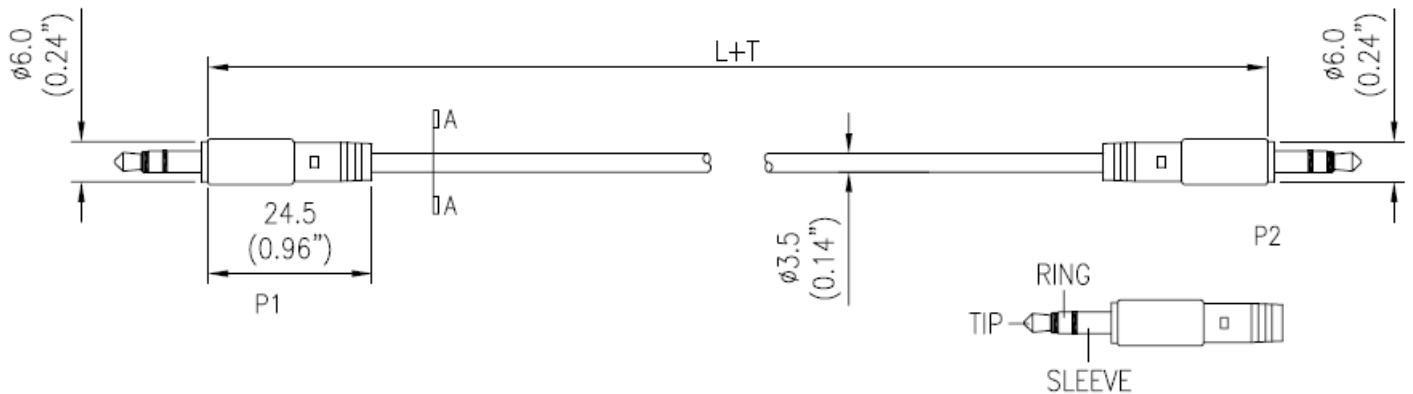

3.5mm STEREO PLUG

PIN OUT			
	P1	P2	
28AWG TIP	—	TIP	BLACK
28AWG RING	—	RING	RED
SLEEVE	—	SLEEVE	DRAIN

Part Number	Description	Weight (lbs)
22600	3ft Slim Aux 3.5mm Audio Cable - M/M	.043
22601	6ft Slim Aux 3.5mm Audio Cable - M/M	.082
22602	10ft Slim Aux 3.5mm Audio Cable - M/M	.125



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

