



### **Universal Power Cord (NEMA 5-15P to IEC320C13)**

- Universal style power cord for use with many products (PC's, monitors, printers, etc)
- Supports 125V, 10A
- 18 AWG
- TAA compliant



# Specifications: Universal Power Cord (NEMA 5-15P to IEC320C13)

## Electrical Characteristics:

Conductor :	18AWG 3C 300V, 10A
Resistance:	20°C≤22.4ohms/km at 25°C≤22.8ohms/km
DVW Test:	1500VAC, 1S
Insulation:	Min-Thickness: 0.33mm; DIA:2.0±0.1mm
Jacket:	Min-Thickness: 0.61mm; Avg Thickness: 0.76mm
Operating Temperature:	60°C
Storage Temperature:	-20°C ~ 60°C

## Physical Characteristics:


OD:	6.3±0.1mm
Warranty:	Lifetime
Package Type:	Polybag
Approvals:	RoHS

### Connector (P1):

Type	IEC-320 C13
Rated Power	125V 10A UL-E135710, CSA-LL95737

### Connector (P2):

Type	NEMA 5-15R
Rated Power	125V 10A UL-E135710

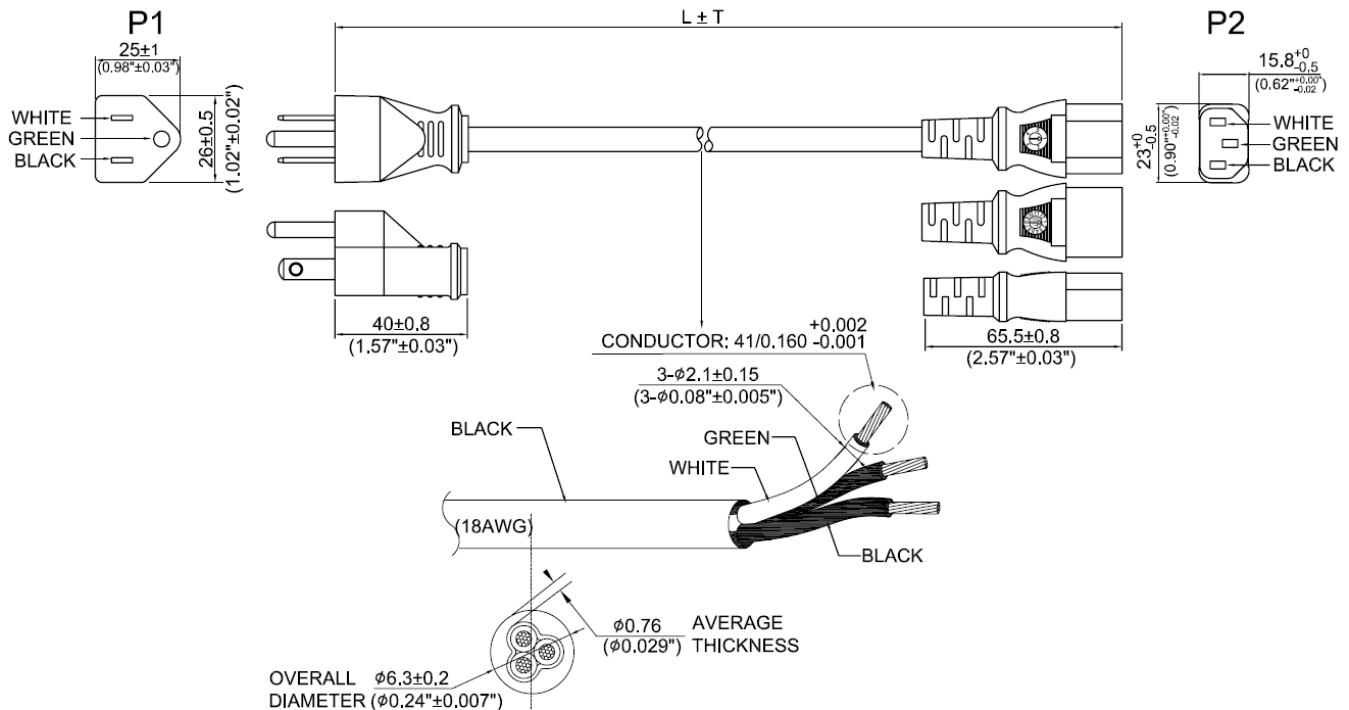

## Specifications: Universal Power Cord (NEMA 5-15P to IEC320C13)

Part Number	Description	Weight (lbs)
24240	1ft 18 AWG Universal Power Cord (NEMA 5-15P to IEC320C13)	.15
03129	3ft 18 AWG Universal Power Cord (NEMA 5-15P to IEC320C13)	.24
03130	6ft 18 AWG Universal Power Cord (NEMA 5-15P to IEC320C13)	.37
03134	10ft 18 AWG Universal Power Cord (NEMA 5-15P to IEC320C13)	.39
53406	12ft 18 AWG Universal Power Cord (NEMA 5-15P to IEC320C13)	.62
09482	15ft 18 AWG Universal Power Cord (NEMA 5-15P to IEC320C13)	.75
14719	25ft 18 AWG Universal Power Cord (NEMA 5-15P to IEC320C13)	1.19

