

SPECIFICATION SHEET



10/100/1000Base-TX to 1000 Base SC/LC Gigabit Media Converters

- Supports Gigabit speeds
- Perfect for use in installations where fiber is already installed
- Supports extreme distances over Fiber (110km)
- TAA compliant


Specifications: 10/100/1000Base-TX to 1000 Base SC/LC Gigabit Media Converters

Electrical Characteristics:

Maximum Distance:	Fiber Optic—UP to 110km RJ-45—100m
Power Input:	12V DC
Frequency:	47 to 64Hz
Power Consumption:	0.23A @12V
Safety & Emissions:	FCC Part 15 of Class A & CE Approved

Physical Characteristics:

Operating Temperature:	0°C to 50°C
Storage Temperature:	-25°C to 70°C
Operating Humidity:	10% to 80% RH
Storage Humidity:	5% to 90% RH
Dimensions (W x H x D):	109.2 x 23.4 x 73.8mm

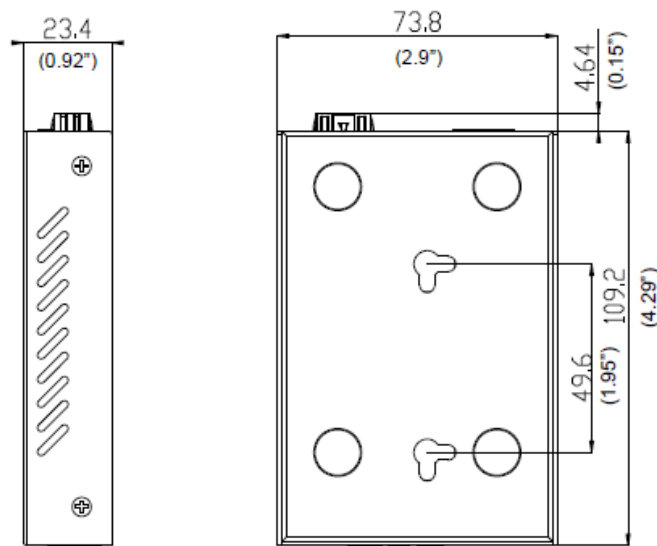

Specifications: 10/100/1000Base-TX to 1000 Base SC/LC Gigabit Media Converters

Part Number	Description	Weight (lbs)
26632	10/100/1000Base-TX to 1000 Base SC LC MM Gigabit Media Converter	0.35
26633	10/100/1000Base-TX to 1000 Base SC SC MM Gigabit Media Converter	0.35

©2014 Legrand All Rights Reserved SpecSheet MSPEC_26632-33_R0



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
www.c2g.com

Follow Us

