

SPECIFICATION SHEET



HDMI® and VGA + 3.5mm Stereo Audio HDBaseT over Cat5 Extender Transmitter

- Extend HDMI or VGA up to 230ft
- Switch between a VGA source and up to two HDMI sources
- Control this device remotely using serial RS232
- Support up to 4k resolution up to 115ft
- 3 Year Warranty

HDMI® and VGA + 3.5mm Stereo Audio HDBaseT over Cat5 Extender Transmitter

Signal Specifications:

Video Input Signal Support:	HDMI, VGA
Video Output Signal Support:	HDMI, HDBaseT
Maximum Cable Distance:	230ft*
Maximum VGA Video Resolution:	1080p
Maximum HDMI Video Resolution:	4k
Recommended Category Cable:	Solid Cat6

*Solid conductor Cat6 cabling is recommended for use with the digital HDBaseT products. Coiling of excess cable lengths should be avoided for best performance results. Shielded, solid conductor Cat5 or Cat6 cabling is recommended if a cable must be coiled or is run near other high-frequency signaling cables.

Physical Specifications:


Video / Audio Input Port:	HDMI x2, VGA, 3.5mm Stereo
Data / Video Output Port:	RJ45, RJ11, HDMI
Dimensions (LxWxH):	160x100x40mm
Operating Temperature:	0~40°C; 0~80% RH (Non-Condensing)
Storage Temperature:	-10~60°C; 0~80% RH (Non-Condensing)

Power Adapter Specifications:

Electrical Input:	100~240 VAC, 50~60Hz, 0.6A
Electrical Output:	18 VDC, 1.0A
Pin Outer Diameter:	4.75mm
Pin Inner Diameter:	1.7mm
Center Pin Polarity:	Positive
Cable Length:	1530±100mm

HDMI® and VGA + 3.5mm Stereo Audio HDBaseT over Cat5 Extender Transmitter

U INITIAL RELEASE U9-1

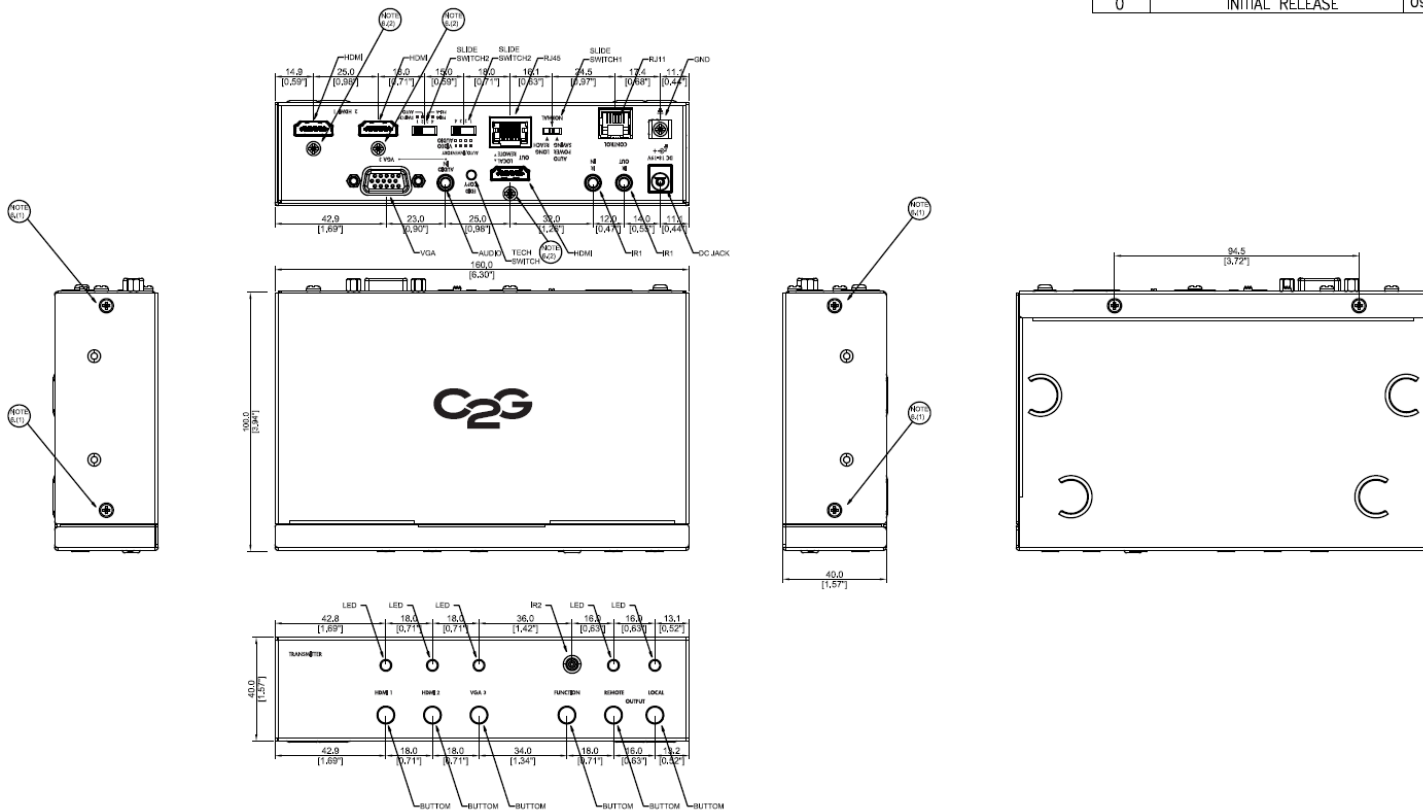

Part Number	Description	Weight (lbs)
29308	HDMI® and VGA + 3.5mm Stereo Audio HDBaseT over Cat5 Extender Transmitter	2.99
29309	HDMI® and VGA + Stereo Audio HDBaseT over Cat5 Extender Transmitter to Receiver Kit	
29319	HDMI® and VGA + Stereo Audio HDBaseT over Cat5 Extender Transmitter to Scaler/De-Embedder Kit	



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

