

SPECIFICATION SHEET



C2G HDMI over Cat5

- Supports full 1080p up to 40m over Cat6 cabling, 1080i up to 50m over Cat5e/6 cabling
- Carries HDMI's Digital Audio & Video signal over 2 Cat5e/6 cables
- Transmitter Wall Plate fits in standard single gang plates
- Box Receiver comes with mounting screws
- TAA compliant

Specifications: C2G HDMI over Cat5

Electrical Specifications:


Maximum Distance Supported: 50m over Cat5e/6 (1080i)
 Maximum 1080p Distance Supported: 40m over Cat6

Power Adapter Specifications:

Input: 100~240VAC, 50~60HZ, 0.8A
 Output: 12VDC, 1.5A
 Pin Diameter: OD—5.5mm, ID—2.1mm
 Center Pin Polarity: Positive

Physical Specifications:

Operating Temperature: 0-40°C, 0-80% RH (Non-condensing)
 Storage Temperature: 10-60°C, 0-80% RH (Non-condensing)
 Approvals: CE Compliant for RoHS2

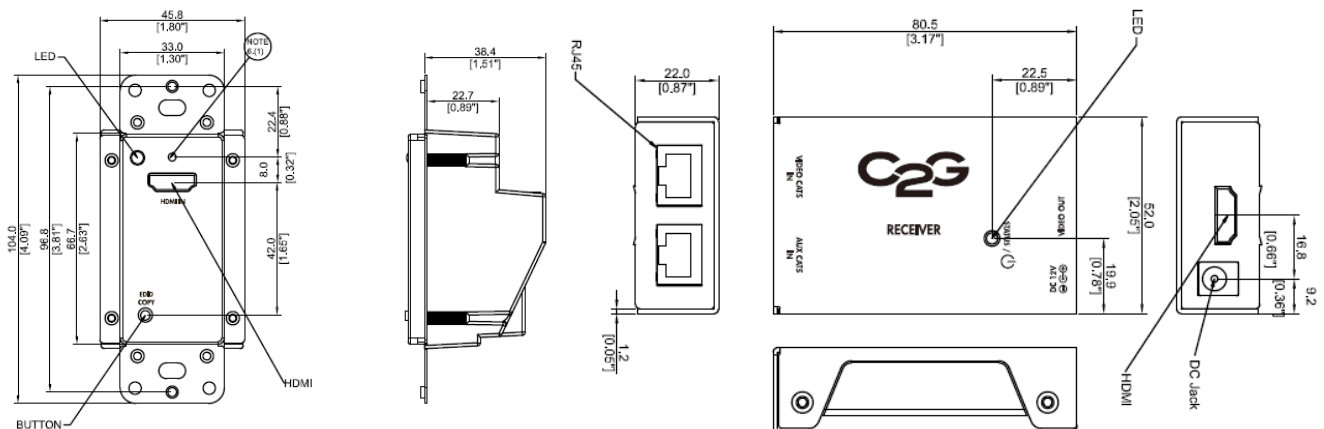

Part Number	Description	Weight (lbs)
29374	C2G HDMI over Cat5	



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

