

SPECIFICATION SHEET



USB-C To DB9 Serial RS232 Adapter Cable

- Reversible, symmetrical USB-C connector to DB9 connector allows for control of serial devices.
- Full-duplex transmitter and receiver (TXD and RXD)
- Supported system:
 - Windows 2000/XP/Vista/7/8
 - Mac OS 8/9, OSX 10.8
 - Linux/Android kernel 2.4.31
- 3 Year Warranty.

Specifications: USB-C To DB9 Serial RS232 Adapter Cable

Electrical Specifications:

Voltage Rating	30V
Insulation Resistance	10M Ω /km
Conductor Resistance	@ 20°C Max

Physical Specifications:

Operating Temperature	0°C to 50°C
Storage Temperature	-25°C to 70°C
Jacket	PVC
Shield	AL-Mylar 100% Coverage
	Braid 16/4/0.12
Drain	28AWG (7/0.12BC)
OD	4.5mm \pm 0.15mm


Conductor 1: (2 Conductors, 5 Pair)

Conductor	28AWG (7/0.12TC)
Insulation	HD-PE, ID:0.8 \pm 0.05mm
Color	White/Green
Shield	AL-Mylar 100% Coverage

Conductor 2: (4 Conductors)

Conductor	26AWG (7/0.16TC)
Insulation	32P-PVC ID:1.0 \pm 0.03mm
Color	Red/Black

Specifications: USB-C To DB9 Serial RS232 Adapter Cable

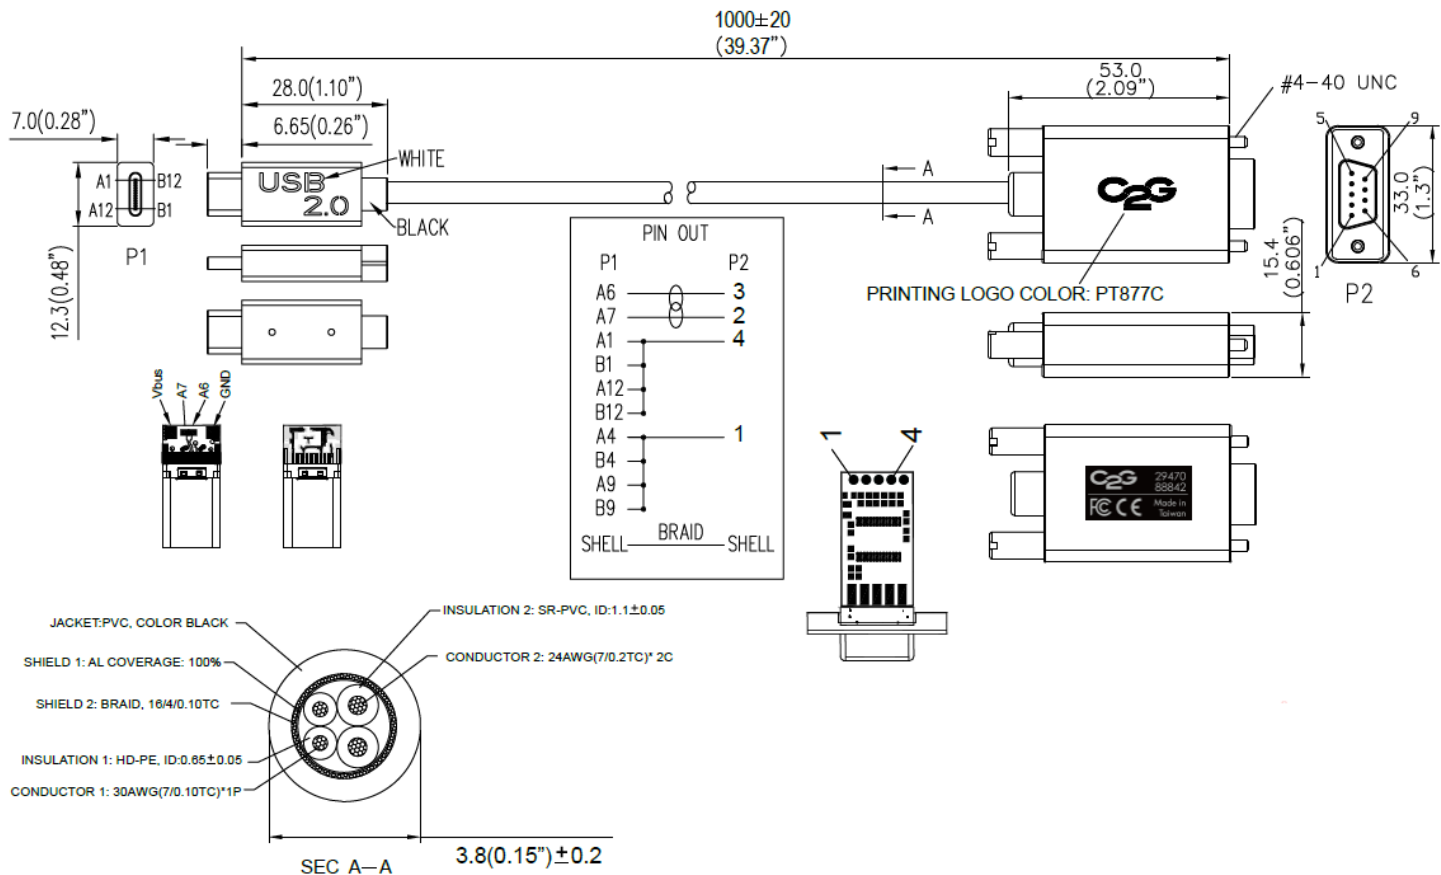

Part Number	Description	Weight (lbs)
29470	USB-C To DB9 Serial RS232 Adapter Cable	.15



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

