

SPECIFICATION SHEET



USB-C To DVI Video Adapter Converter

- Convert USB-C to DVI video signal
- No driver is required, which allows for quick setup and no downtime
- Compact light weight design makes it easy to carry for presentations
- Maximum resolution 1920x1080 at 50/60Hz
- Reversible, symmetrical USB-C connector
- 3 year warranty

Specifications: USB-C To DVI Video Adapter Converter

Electrical Specifications:

| | |
|------------------------|--|
| Voltage Rating: | 30V |
| Conductor Resistance: | 32AWG 588.85Ω/km at 20°C |
| Insulation Resistance: | 10m-km/min at 20°C DC 500V (EIA-364-21) |
| Dielectric Strength: | AC 500V/1 minute No breakdown (EIA-364-20) |

Physical Specifications:

| | |
|------------------------|--|
| Operation Temperature: | 0°C - 50°C; 15-85% RH (Non-Condensing) |
| Storage Temperature: | -25°C - 70°C; 15-85% RH (Non-Condensing) |
| Jacket: | PVC |
| Outer Diameter: | 3.9 ± 0.1mm |
| Shield: | Braid 16/9/0.06(TC) |

Conductor 1: (2 Conductors, 5 Pair)

| | |
|-------------|---|
| Conductor: | 34 AWG 7/.06(TC) |
| Insulation: | 0.45 (HD-PE) |
| Shield: | Aluminum Mylar |
| Color: | P1 White / Green P2 White / Red P3 White / Green P4 White / Blue |


Conductor 2: (2 Conductors)

| | |
|-------------|-------------------|
| Conductor: | 24 AWG 7/.205(TC) |
| Insulation: | 0.90 (HD-PE) |
| Color: | Red Black |

Conductor 3: (6 Conductors)

| | |
|-------------|---|
| Conductor: | 32 AWG 7/.08(TC) |
| Insulation: | 0.50 (HD-PE) |
| Shield: | Aluminum Mylar |
| Color: | White Green Brown Yellow Blue Orange |

Specifications: USB-C To DVI Video Adapter Converter

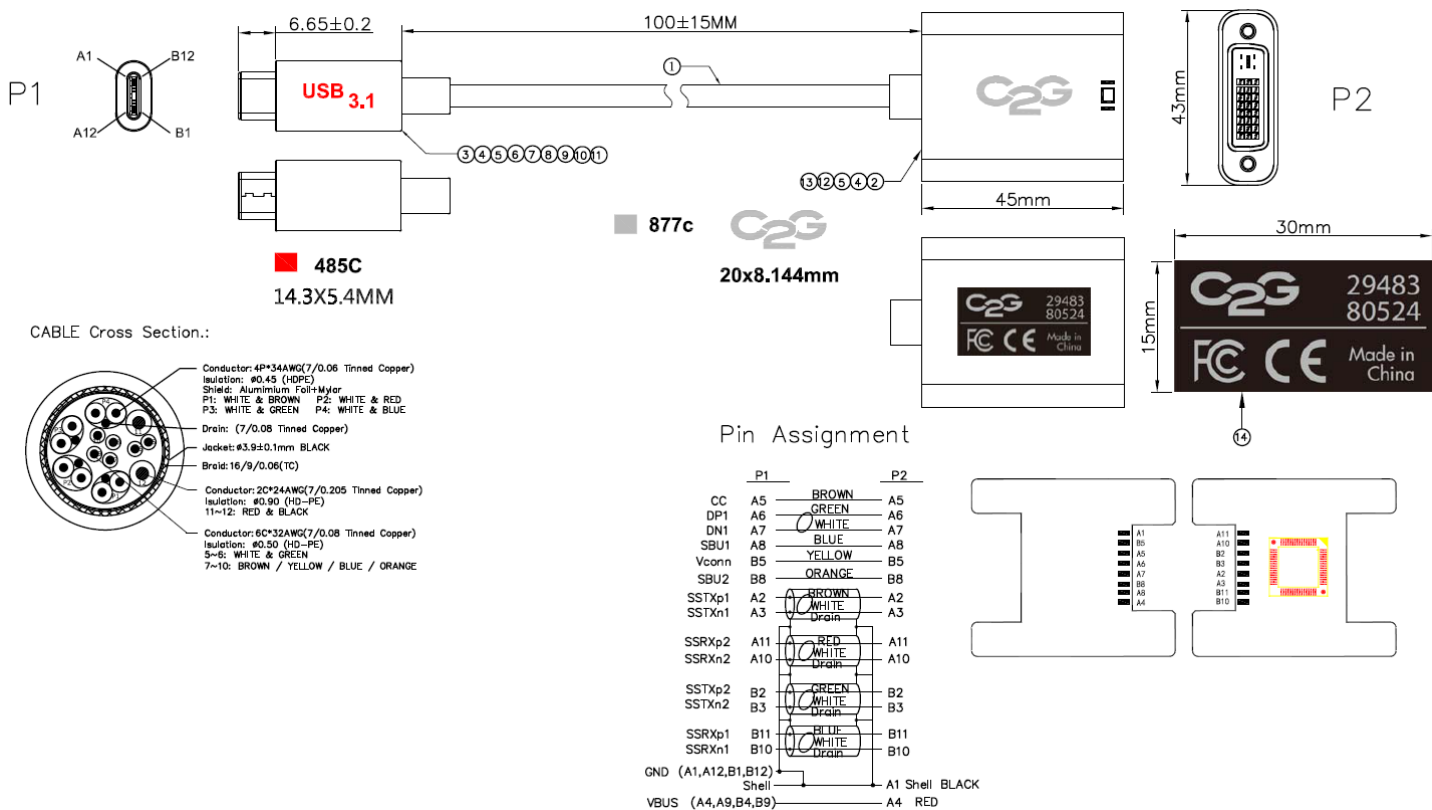

| Part Number | Description | Weight (lbs) |
|-------------|--|--------------|
| 29483 | USB-C to DVI Video Adapter Converter-Black | .086 |
| 29484 | USB-C to DVI Video Adapter Converter-White | .086 |



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

