

SPECIFICATION SHEET



HDMI Cable With Gripping Connectors

- Provides 3 times greater retention than standard HDMI
- Supports Standard Speed HDMI with Ethernet
- Supports resolutions up to 1080i
- Gold plated connectors
- Lifetime Warranty

Specifications: HDMI Cable With Gripping Connectors

Electrical Specifications:

| | |
|------------------------|--------------------------------------|
| Voltage: | 30V |
| Dielectric Strength: | AC-500V/S Minute |
| Insulation Resistance: | DC 500 100M Ω Km Min. at 20°C |
| Conductor Resistance: | 26AWG 148 Ω /Km max at 20°C |

Physical Specifications:

| | |
|-----------------------|--|
| Cable Outer Diameter: | 8.50mm \pm 0.20mm |
| Shield: | Aluminum Mylar - 100% Coverage 25% Overlap minimum |
| | Braid - A-M Alloy 24/9/0.12mm |
| Drain: | 26AWG Tinned Copper 7/0.16 \pm 0.008mm |


Conductor:

| | |
|--------------------|--|
| Material: | Tinned Copper |
| Size: | 26AWG 7/0.16 |
| Insulation Pairs: | FM-PE+Skin |
| Color Pairs: | Black/White Brown/White Red/White Green/White Blue/White |
| Insulation Single: | HD-PE |
| Color Single: | Red, Orange, Yellow, White |

HDMI Connector

| | |
|-------------------|----------------------------------|
| Gender: | Male |
| Insulation: | Black |
| Contact Material: | Gold Flashing |
| Port Retention: | 6.6lbs Minimum withdraw force |

Specifications: HDMI Cable With Gripping Connectors

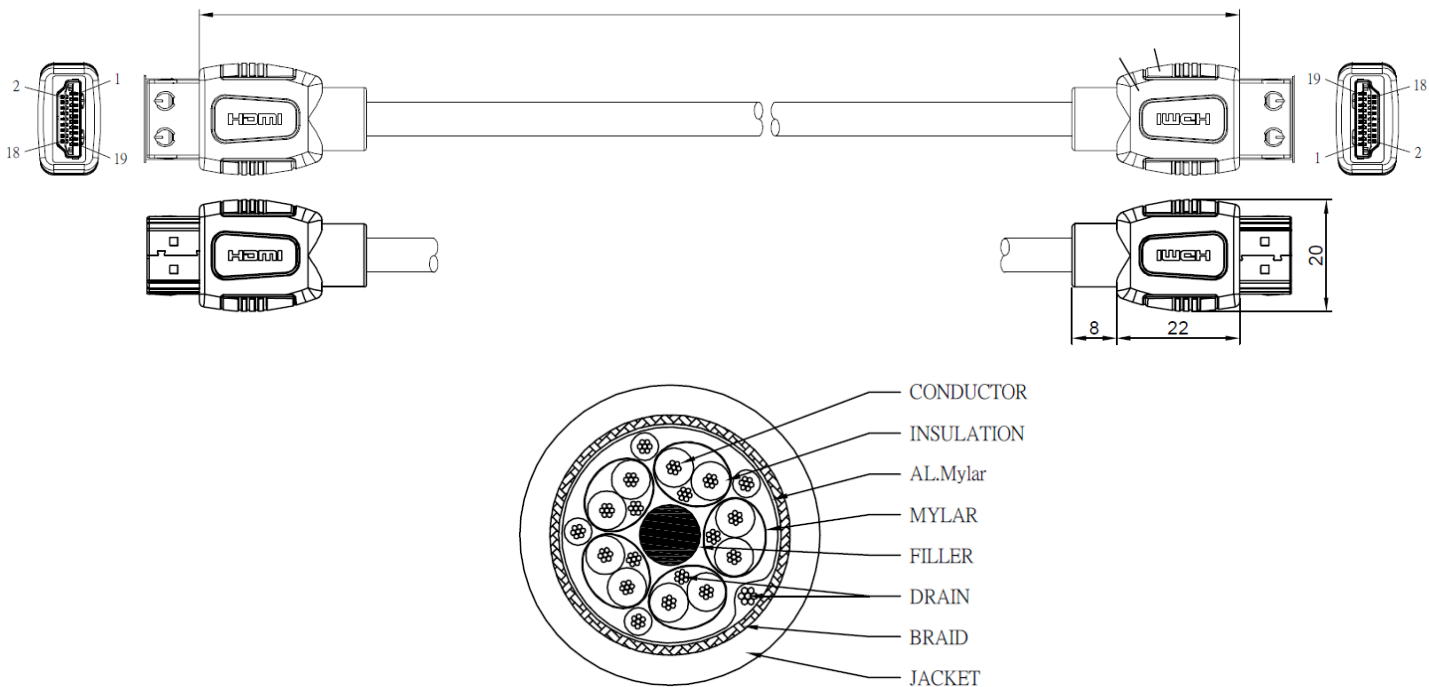

| Part Number | Description | Weight (lbs) |
|-------------|--|--------------|
| 29684 | 35ft HDMI cable with gripping connectors | 1.36 |



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

