

SPECIFICATION SHEET



Compact Amplifier With External Volume Control

- 15 watts (RMS) per channel
- Remote wired wall plate controller
- 1/4" dynamic microphone and 3.5mm stereo audio line level inputs
- Built in mounting bracket
- 3 year warranty

Specifications: Compact Amplifier With External Volume Control


Electrical Specifications:

Output Power:	15W (RMS) Per Channel (@ RL = 4Ω)
Total Harmonic Distortion:	0.06% (at RL = 8Ω, F = 4Ω)
Minimum Load Resistance:	4Ω
Chipset:	(ST LM833DT, (TI) TPA3110D2PWPR
Microphone Pre-Amplifier Gain:	40dB
Power Source:	12V / 2A


Amplifier Physical Specifications:

Amplifier Type:	Class D
Physical Dimensions (HxWxD)	31 x 113.5 x 97.6mm
Material:	Housing Steel
Inputs:	Dynamic Microphone or Stereo Audio Line Level
Operating Temperature:	0° to +50°C / 20-80% RH (Non-Condensing)
Storage Temperature:	-20° to +70°C / 10-90% RH (Non-Condensing)
Approvals:	RoHS2, FCC

TO SPEAKER SCREW TERMINALS HANDLE WIRE SIZES FROM 24 TO 12 GAUGE.

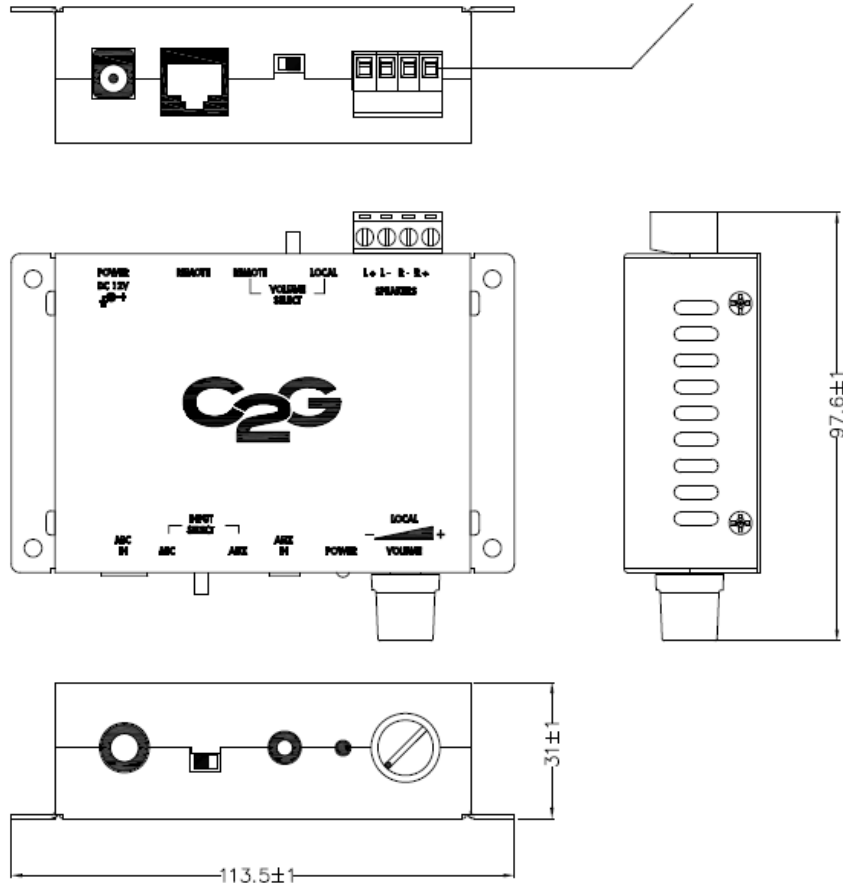

MOUNTING SCREWS x 4PCS
SIZE : M3.5x 11mm




MAJOR DIAMETER: 3.59-3.43mm

Specifications: Compact Amplifier With External Volume Control



Volume Control Wall Plate Physical Specifications:

Wall Plate Overall Physical Dimensions (HxWxD)	114 x 69.5 x 6.5mm
Material:	ABS
Volume Control Plate Overall Dimensions (HxWxD)	103 x 33.1 x 49.6mm
Material:	ABS
Operating Temperature:	0° to +50°C / 20-80% RH (Non-Condensing)
Storage Temperature:	-20° to +70°C / 10-90% RH (Non-Condensing)
Approvals:	RoHS2, FCC

WALL PLATE MOUNTING SCREWS x 2PCS
 SIZE : M3.5x 8mm



BRACKET MOUNTING SCREWS x 2PCS
 SIZE : #6-32x 25mm

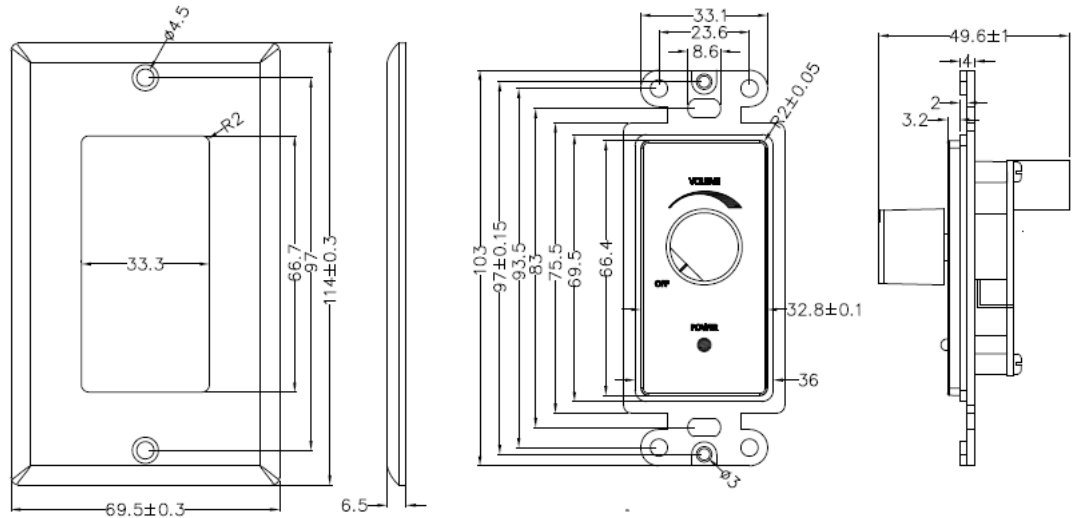

Part Number	Description	Weight (lbs)
40914	Compact Amplifier with External Volume Control	1.3 lbs



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

