



## HDMI to VGA Decora Style Wall Plate

- Available in White, Aluminum, Black and Ivory
- Converts HDMI to VGA + Stereo Audio
- Supports up to 1920x1200 Resolution
- Lifetime Warranty



# Specifications: HDMI to VGA Decora Style Wall Plate

## Electrical Specifications:

---

Conductor Resistance:	@ 20°C Max, 28AWG: 237.25 ohms/km 30AWG: 376.96 ohms/km
Coax Cable Impedance:	@10MHz 75±5
Insulation Resistance:	10m ohm-km min at 20°C DC 500V
Dielectric Strength:	AC 5000V/1 Min no breakdown

## Physical Specifications:

---

Operating Temperature:	0°C to 50°C
Storage Temperature:	-25°C to 70°C
Approvals:	CE
Warranty:	Lifetime
Voltage:	30V

### Conductor (3):

---

Conductor:	28AWG (7/0.127TC)
Insulation:	FM-PE, ID: $\varnothing 1.6 \pm 0.05$
Shield:	Spiral, 42±2/0.12±0.008TC

### Conductor (1 Pair):

---

Conductor:	30AWG (7/0.1TC)
Insulation:	SR-PVC, ID: $\varnothing 0.80 \pm 0.05$
Shield:	Spiral, 42±2/0.10TC

### Conductor (8):

---

Conductor:	30AWG (7/0.1TC)
Insulation:	SR-PVC, ID: $\varnothing 0.6 \pm 0.05$

### Conductor (1 Pair):

---

Conductor:	24AWG (7/0.20TC)
Insulation:	SR-PVC, ID: $\varnothing 1.1 \pm 0.05$


## Overall Cable

---

Shield:	Braid, 24xi/0.12TC AL Mylar Coverage—100%
Jacket:	PVC
OD:	7.3±0.15



# Specifications: HDMI to VGA Decora Style Wall Plate

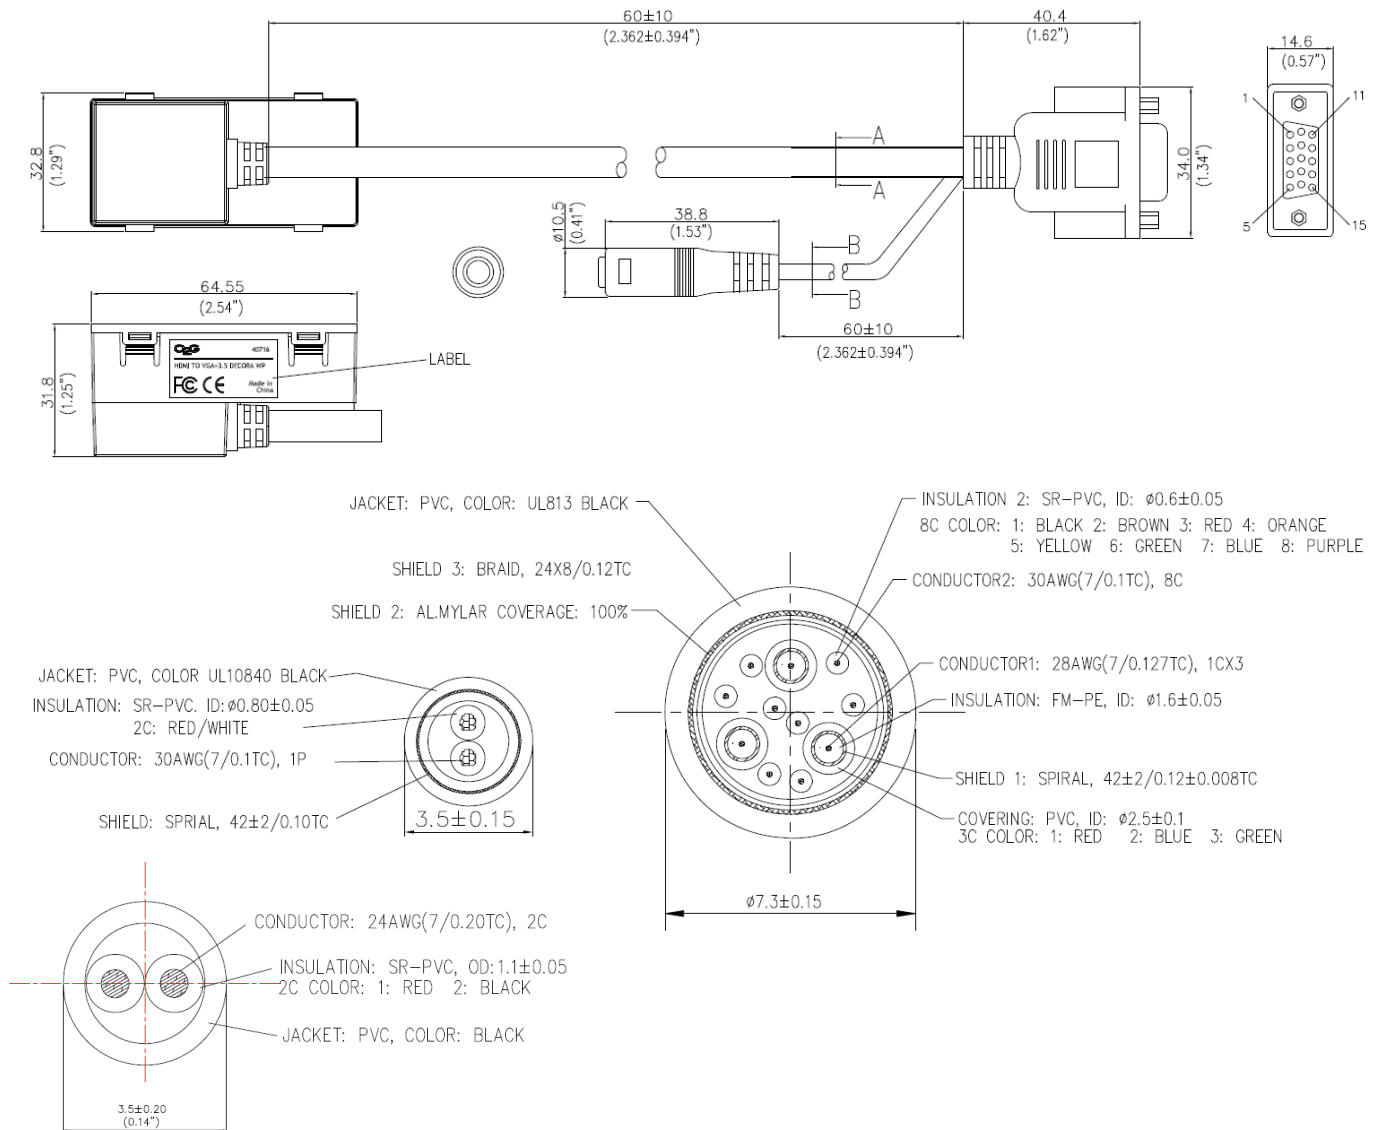

Part Number	Description	Weight (lbs)
41344	HDMI to VGA Decora Style Wall Plate—White	
41345	HDMI to VGA Decora Style Wall Plate—Aluminum	
41346	HDMI to VGA Decora Style Wall Plate—Ivory	
41347	HDMI to VGA Decora Style Wall Plate—Black	

