

## SPECIFICATION SHEET



### Mini HDMI Dongle Adapters

- Converts an HDMI Digital A/V signal to standard HDMI and DVI
- Maximum resolution of 1080p
- Plug & play, powered by the HDMI source device

## Specifications: Mini HDMI Dongle Adapters

### Electrical Characteristics:

Max Resolution Supported:	1920x1200, 1080p
Voltage:	5V, 500mA (VGA models)
Voltage Rating:	30V
Pixel clock rate:	Up to 165MHz
Impedance :	100±5
Intra-pair skew:	15ps/m max

### Physical Characteristics:


Minimum Bend Radius:	12mm
Operating Temperature:	0°C to 70°C
Storage Temperature:	-10° to 40° C
Adapter Length:	203mm
Approvals:	CE

#### Conductor (Qty. 3):


Conductor Type:	32AWG 7/0.08TCS x15 Tinned Copper
Insulation:	Foam-PE, $\phi 0.63 \pm 0.05$
Shield:	AL Wrap; Braid, 16/6/0.12AMA 75% Coverage
Drain:	32AWG 7/0.127B

#### Overall Cable

Jacket:	PVC, Black
OD:	5.5 $\phi$ 0.2

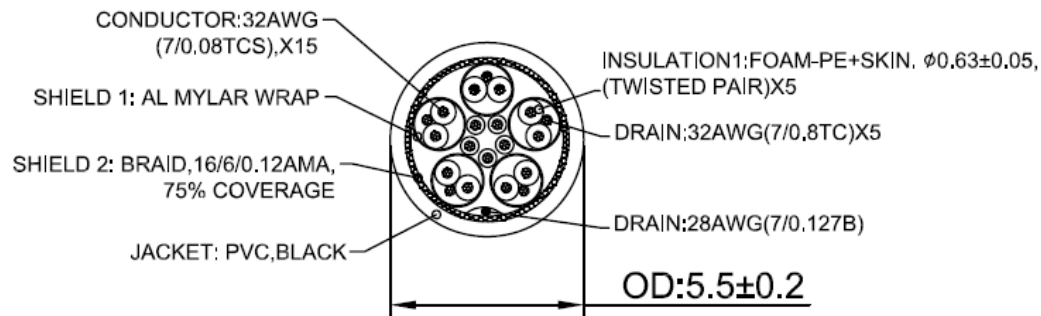

## Specifications: Mini HDMI Dongle Adapters

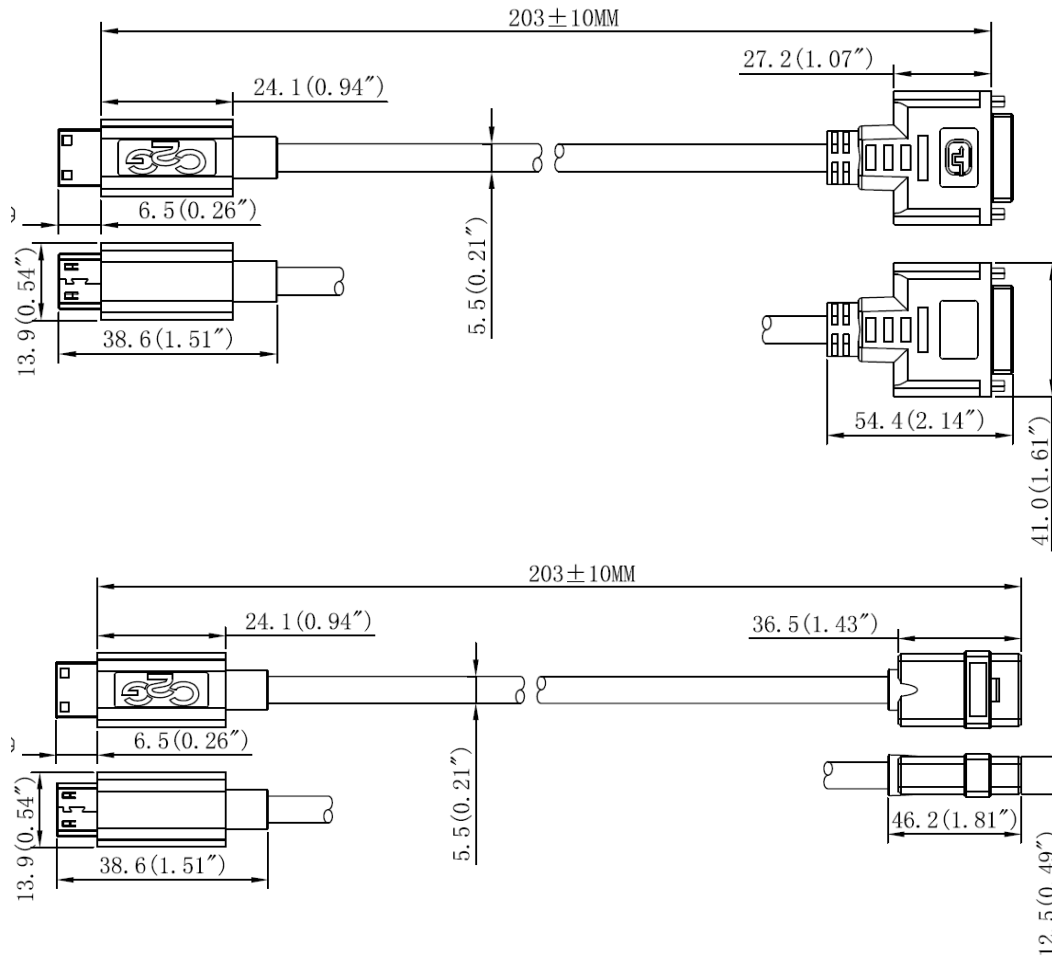

Part Number	Description	Weight (lbs)
41355	Mini HDMI Male to DVI Female Dongle	
41356	Mini HDMI Male to HDMI Female Dongle	

©2014 Legrand All Rights Reserved SpecSheet MSPEC\_41355-56\_R0



**CABLES TO GO**

Cables To Go  
 3555 Kettering Blvd.  
 Moraine, OH 45439  
 Phone: 800.287.2843  
 www.c2g.com

Follow Us

