

SPECIFICATION SHEET



Micro HDMI Dongle Adapters

- Converts a Micro HDMI Digital A/V signal to Standard HDMI, DVI and VGA
- Maximum resolution of 1080p (1920x1200)
- Plug & play, powered by the HDMI source device and USB power
- Utilizes Micro USB for Power (VGA dongle)

Specifications: Micro HDMI Dongle Adapters

Electrical Characteristics:

Resolutions Supported:	480i/480p, 576i/576p, 800x600, 720i/720p 1280x1024, 1600x1200, 1080i/1080p
Voltage:	5V, 500mA
Voltage Rating:	30V
Pixel clock rate:	Up to 165MHz
Impedance :	100±5
Intra-pair skew:	15ps/m max

Physical Characteristics:


Minimum Bend Radius:	12mm
Operating Temperature:	0°C to 70°C
Storage Temperature:	-10° to 40° C
Adapter Length:	203mm
Approvals:	CE

Conductor (Qty. 3):



Conductor Type:	34AWG 7/0.06TCS x15
Insulation:	Foam-PE, $\phi 0.5 \pm 0.05$
Shield:	AL Wrap; Braid, 16/6/0.8TCS 85% Coverage
Drain:	34AWG 7/0.6TCS

Overall Cable

Jacket:	PVC, Black
OD:	4.8 ϕ 0.15

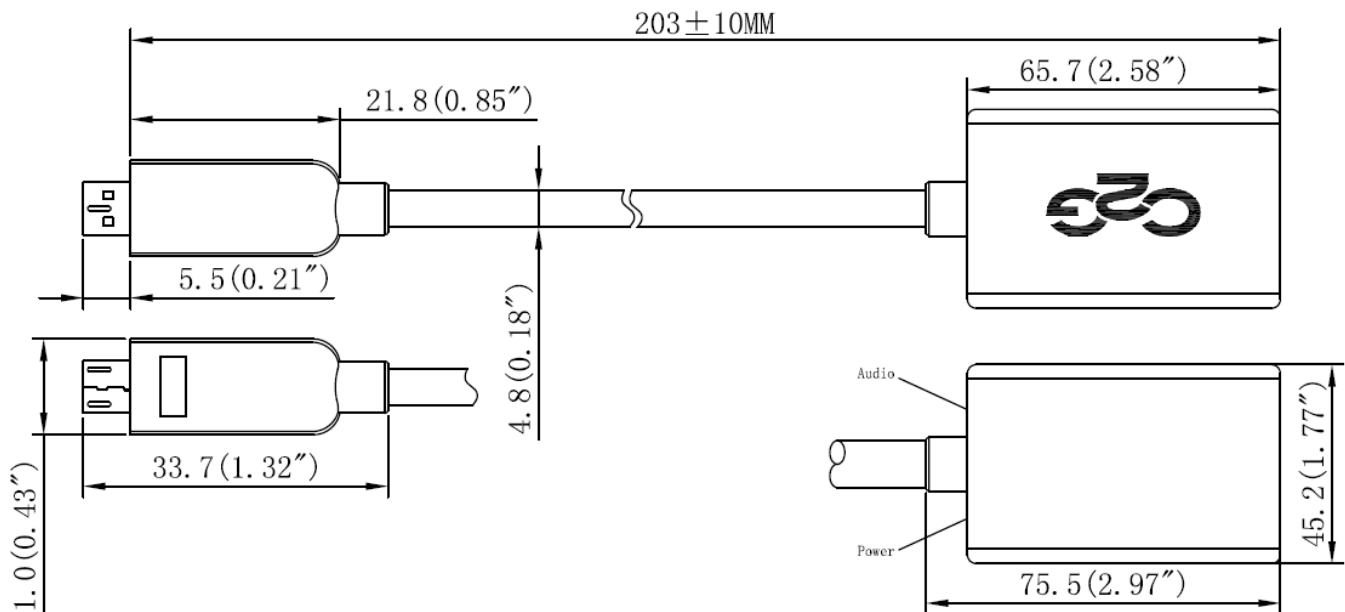

Specifications: Micro HDMI Dongle Adapters

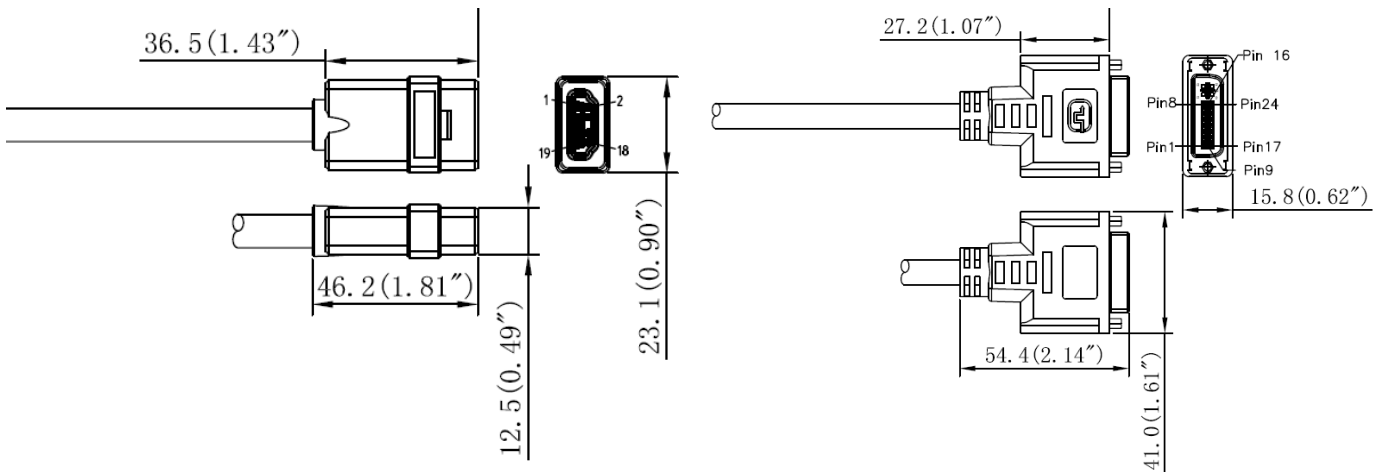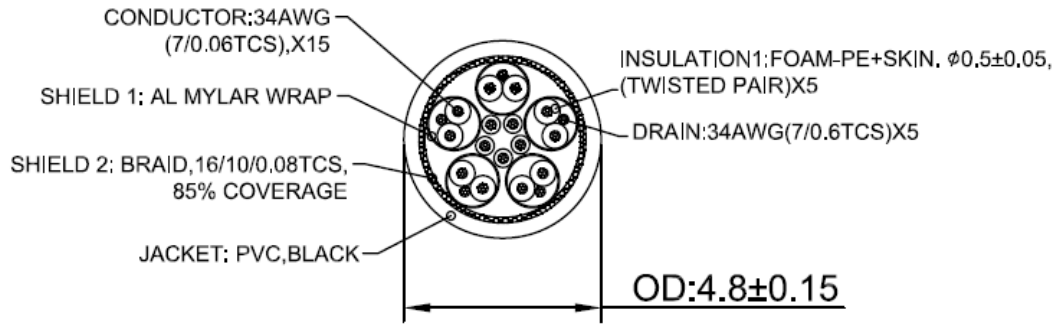

Part Number	Description	Weight (lbs)
41357	Micro HDMI Male to HDMI Female Dongle	
41358	Micro HDMI Male to DVI Female Dongle	
41359	Micro HDMI Male to VGA Female Dongle with Power and Audio	

©2014 Legrand All Rights Reserved SpecSheet MSPEC_41350-52_R0



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
www.c2g.com

Follow Us

