

SPECIFICATION SHEET



DVI to DisplayPort Adapter Converter

- Convert DVI to DisplayPort
- Support resolutions up to 1920x1080
- Dongle style adapter reduces strain on ports
- 3 Year Warranty

Specifications: DVI to DisplayPort Adapter Converter

Electrical Specifications:

Maximum Resolution:	1920x1080
Voltage Rating:	30V
Impedance Ω TDR:	100 \pm 5
Intra-Pair Skew:	15PS/M Max
Insulation Resistance:	Foam-PE/HD-PE DC-500V 100M Ω .Km Min At 20°C

Differential Near-End Crosstalk Between Super Speed Pairs

Start	Stop	LIM from	LIM to	LO	@(MHz)	L1	@(MHz)	L2	@(MHz)	L3	@(MHz)	Aux
100	675	-15	-15	-2.25	410.5	-1.5	450	-1.17	445	-1.78	272.5	-1.68
675	7000	-15	-2.5	-10.22	4878.25	-11.59	4861	-13.47	4895.5	-12.76	4895.5	-12.59
MHz	MHz	dB	dB	Pass		Pass		Pass		Pass		Pass

Physical Specifications:

Housing:	ABS
Jacket Material and Thickness:	PVC (0.5mm)
Minimum Bend Radius:	12mm
Mean Time Between Failure:	4000 hr
Operating Temperature:	0°C to 70°C
Storage Temperature:	-10°C to 40°C


DVI Cable Physical Specifications:

Cable Outer Diameter:	4.8mm \pm 0.2
Conductor:	34 AWG (7/0.06 TCS) x15
Shield 1:	Al Mylar Wrap
Shield 2:	Braid, 16/10/0.08 TCS (85% Coverage)
Drain:	34 AWG (7/0.6 TCS) x5
Insulation:	Foam-PE+Skin 0.5 \pm 0.05

USB Cable Physical Specifications:

Cable Outer Diameter:	2.8mm \pm 0.2
Conductor:	28 AWG (7/0.127 TCS) x2
Insulation:	HDPE 0.85 \pm 0.05

Specifications: DVI to DisplayPort Adapter Converter

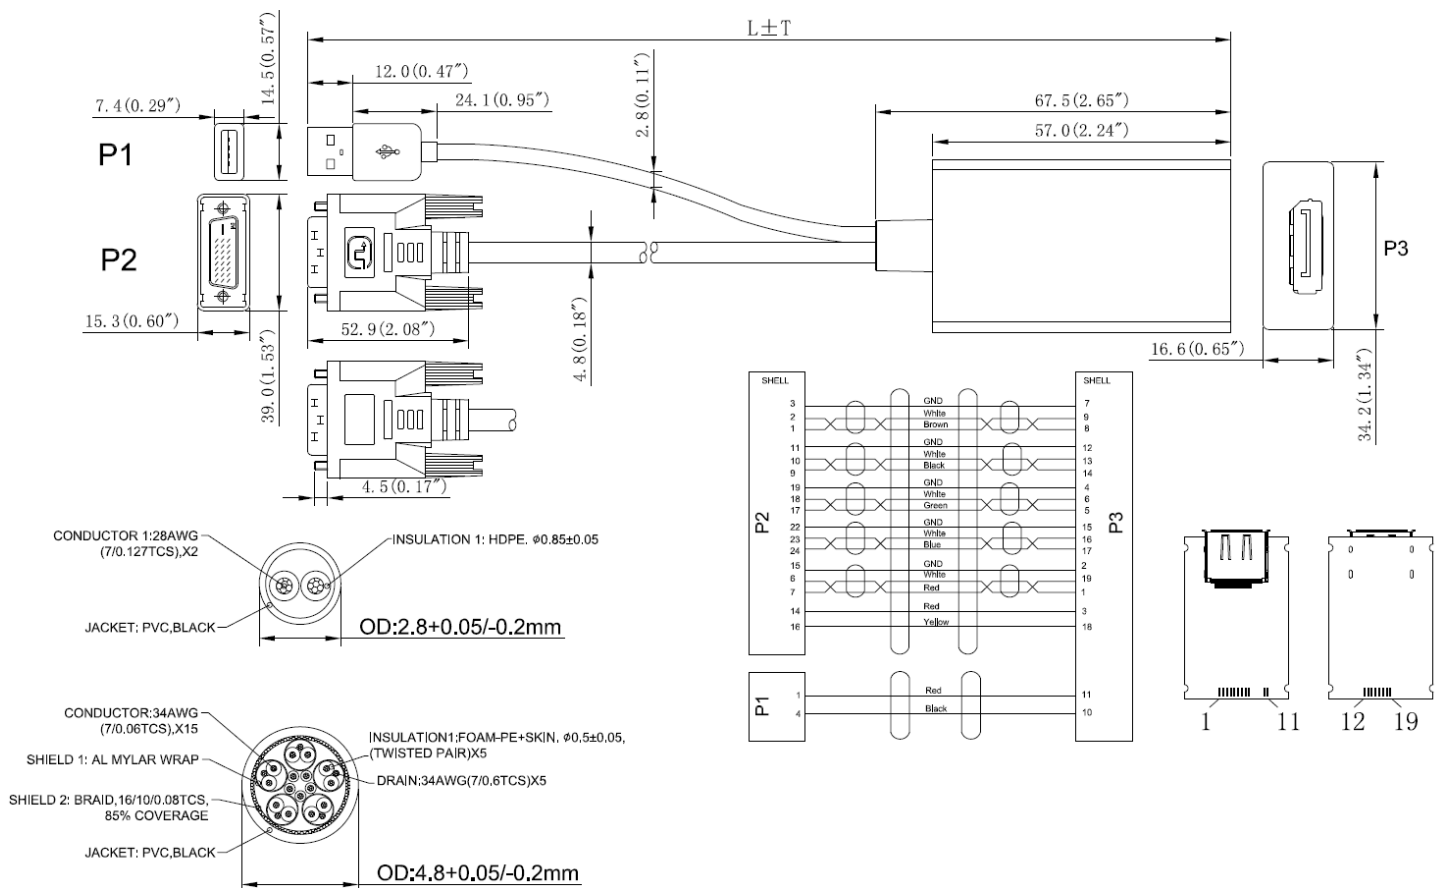

Part Number	Description	Weight (lbs)
41379	DVI to DisplayPort Adapter Converter	.231



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

