


For fast Ethernet networks that require bandwidth-intensive voice, data, or video distribution applications. Meets all Cat5e TIA/EIA standards, and drastically reduces both impedance and structural return loss (SRL). Each of the individual pairs is bonded together to help maintain the twist-spacing throughout the line right up to the termination point. Constructed from high quality copper cable, this design minimizes Near-End Crosstalk (NEXT) levels. Available in a variety of colors to easily color-code your network installation.

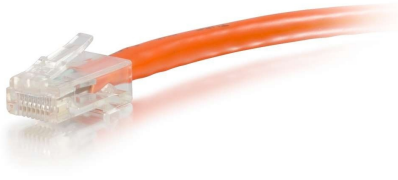

Features & Benefits

Designed for network adapters, hubs, switches, routers and more

Constructed with unshielded twisted pair wires

Available in 10 colors to color-code a network

Available in lengths up to 150ft

CMG In-Wall Rated Jacket

Specifications

General Info

| | | | |
|-------------------|--------|-------------------------|-------------------------------------|
| Product Line | C2G | Replaced by Part Number | 04209 |
| Color | Orange | UPC Number | 757120005841 |
| Country Of Origin | China | Application Sector | Commercial, Industrial, Residential |
| Type | Cable | | |

Dimensions

| | | | |
|--------------|--------|------------------|--------|
| Cable Length | 100 ft | Outside Diameter | 5.3 mm |
|--------------|--------|------------------|--------|

Technical Information

| | | | |
|-----------------|--------------------------|-----------------------------|----------------------|
| Jacket Material | PVC (Polyvinyl Chloride) | Category Performance Rating | Cat 5e |
| Wire Gauge | 24 AWG | Shielded/Unshielded | Unshielded |
| Conductor | 4-Pair Twisted | Shield Type | UTP |
| Cable Type | Ethernet Patch Cable | Jacket Rating | Standard / Non-Rated |
| Cable Diameter | 5.3 mm | Connector Type | Non-booted |
| Indoor/Outdoor | Indoor | Connector 2 | RJ-45 Male |

Connector 1

RJ-45 Male
