



**TruLink® Media Gateway HDMI Plenum Rated Cable with 90° downward-angled male connector**

- Supports video resolutions up to 1080p
- Designed for use with TruLink Media Gateway products
- Captive screw to attach to back of the TruLink Media Gateway






# Specifications: HDMI Plenum Rated Cable with 90° downward-angled male connector

## Signal Specifications:

Signal Support:	HDMI
Rating:	Plenum
Maximum Resolution:	1080p
Impedance:	100±10ohms
Attenuation:	
	0.3~825MHz <5db/6m
	0.825~2.475GHz <5~12db/6m
	2.457~4.125GHz <12~20db/6m
	4.125~5.10GHz <20~25db/6m

## Physical Characteristics:

Connectors:	HDMI Male x 2
Cable OD:	9±0.2mm
Rating:	Temp 80°C
Voltage:	30V
Metal Screw:	M3x0.5x6mm LG; L=17mm
Operating Temperature:	0~50°C
Storage Temperature:	-25°C~70°C

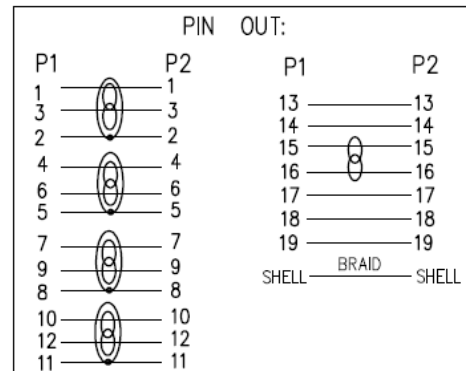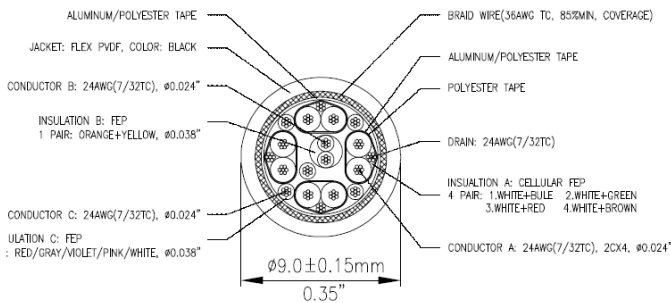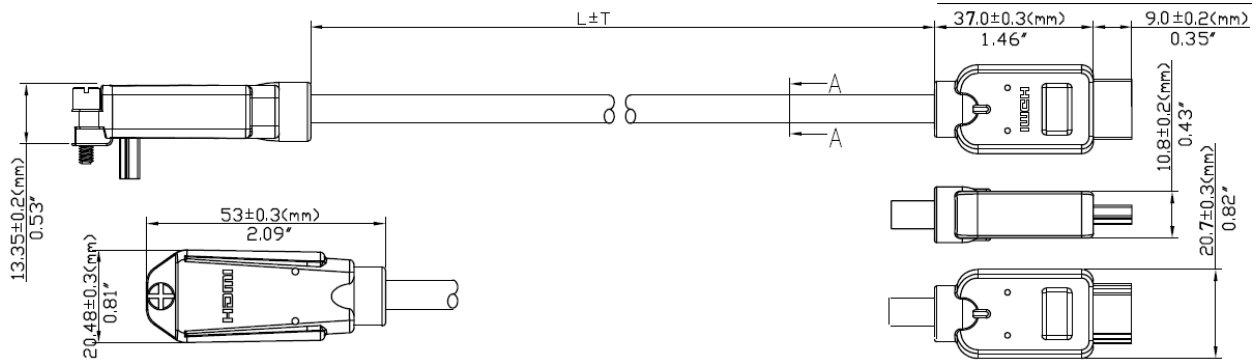

## Specifications: HDMI Plenum Rated Cable with 90° downward-angled male connector

Part Number	Description	Weight (lbs)
50328	5m TruLink Media Gateway HDMI Plenum Rated Cable with 90° downward-angled male connector	1.61
50329	7m TruLink Media Gateway HDMI Plenum Rated Cable with 90° downward-angled male connector	2.41
50330	10m TruLink Media Gateway HDMI Plenum Rated Cable with 90° downward-angled male connector	3.15
50331	15m TruLink Media Gateway HDMI Plenum Rated Cable with 90° downward-angled male connector	4.74

