




**C2G**  
**98.4ft (30m) MTP 9/125 OS1 Single-Mode PVC Fiber Optic Cable (TAA Compliant) - Yellow**  
Part No. CG-31404

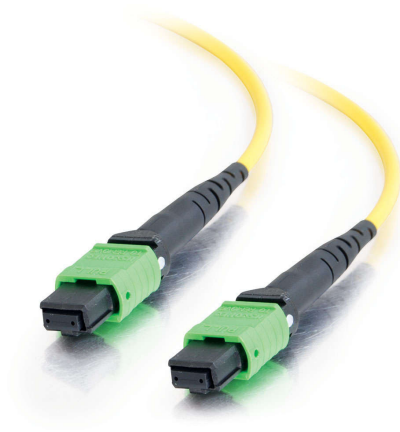

Make MTP/MPO your choice for high density fiber networks; it's specifically designed for fast ethernet, fiber channel, ATM and gigabit ethernet applications. Save time and money with MTP/MPO's increased ease of installation - simply pull one cable rather than twelve. Each MTP/MPO fiber assembly consists of twelve 9/125 single-mode fibers under one PVC (OFNR-rated) jacket.

With our MTP/MPO, it's possible to run a single cable that automatically terminates twelve fibers in one easy plug-in. Plus, the small form factor of an MTP/MPO connector provides a higher port density. With its push-pull release mechanism, the MTP/MPO connector is easy to engage and disengage. Plus, its latch design prevents the plug from snagging when jumper cables are being routed. Straight-through pinning; immune to electrical interference.

Please Note: MTP/MPO is a registered trademark of US Conec Ltd. Attenuation testing performed in accordance with EIA/TIA-455-171A.

## Features & Benefits

Designed to support gigabit ethernet, fibre channel, ATM, or any application that requires high speed data transfer

Ease of installation - simply pull one cable rather than twelve

Small form factor provides a higher port density

Push-pull release mechanism and latch design for easy use

## Specifications

### General Info

Product Line	C2G	Color	Yellow
UPC Number	757120314042	Country Of Origin	Hong Kong
Application Sector	Commercial, Industrial	Warranty Type	Lifetime
Type	Cable		

### Dimensions

Product Length US	98.4 FT	Cable Length	98.4 ft
-------------------	---------	--------------	---------

### Technical Information

Fiber Optic Cable Type	MTP, OS1, Single-Mode	Jacket Material	PVC (Polyvinyl Chloride)
Jacket Application	Riser Rated	Bend Radius	45 mm
Cable Type	Fiber Optic	Jacket Rating	FT4 Rated, OFNR Rated
Cable Diameter	3 mm	Data Transfer Rate	1 Gbps
Adapter Rear	MPO Female	Adapter Front	MPO Female

