



HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Wall Plate Transmitter

- Extend HDMI, VGA and Stereo Audio up to 230 feet at a 1080p resolution
- HDBaseT technology utilizes a single category patch cable for extension and supports HDCP and EDID pass through
- Three methods for input switching, Auto, Manual, Serial RS232
- TruChoice[™] power allows for power at the transmitter or receiver end
- Compatible with any HDBaseT receiver from C2G



Specifications: HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Wall Plate Transmitter

Electrical Specifications:


Maximum Distance Supported:	230ft (70m) at 1920 x 1080
Maximum Distance Supported:	115ft (35m) at 3840 x 2160
Maximum Resolution Supported:	3840 x 2160 (UHD—HDMI)
	1920 x 1200—VGA
Supports:	HDBaseT, HDCP, Serial Control

Power Adapter:

Input Voltage:	100-240 VAC, 50~60HZ
Output Voltage/Amperage:	0.6A, 18VDC, 1.0A
Cable Length:	1530±100mm
Plug Diameter:	4.75mm, ID=1.7mm
Center Pin Polarity:	Positive

Physical Specifications:

Operating Temperature:	0~40°C; 0-80%RH (Non-condensing)
Storage Temperature:	-10~60°C; 0-80%RH (Non-condensing)
Approvals:	CE
Warranty:	Lifetime

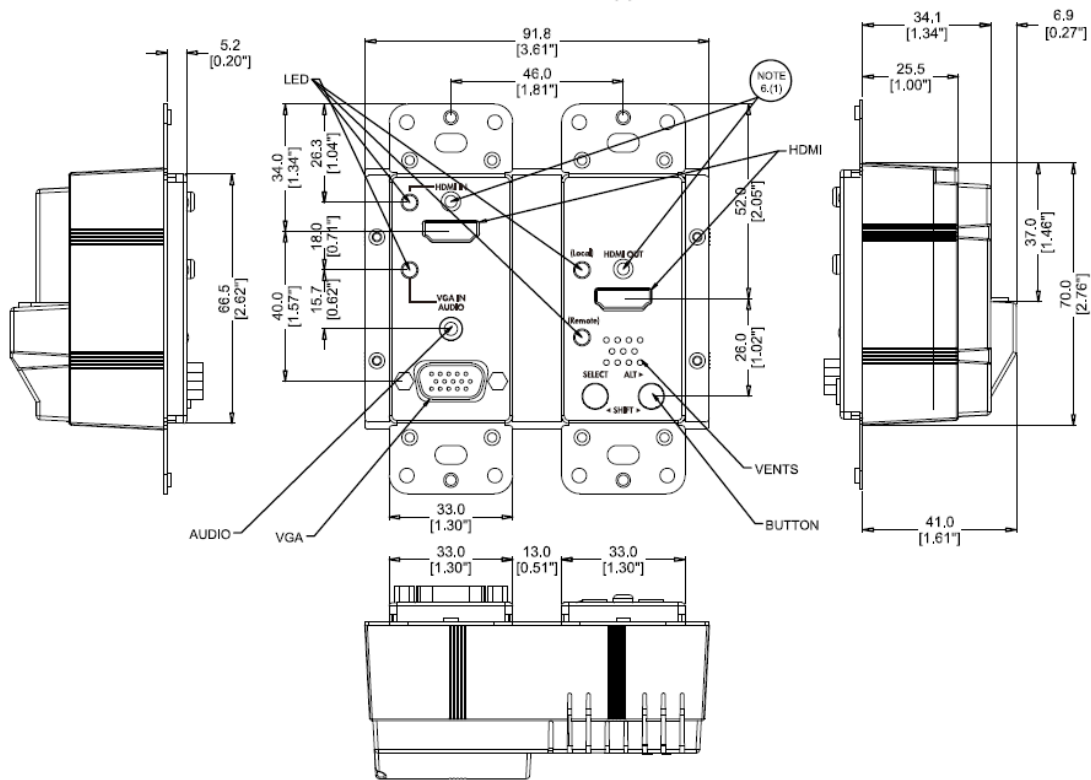

Part Number	Description	Weight (lbs)
29301	HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Wall Plate Transmitter	
29218	HDMI, VGA and Stereo Audio HDBaseT over Cat5 Extender Kit	

