



Cisco® Compatible SFP+ Twinax Direct Attach Cables (DAC)—Passive

- Supports data rates up to 11.1 Gb/s
- Constructed with premium 30AWG, 100Ohm cable
- Features SFP+ and SFF-8431 standards based connectors with quick release pull-latches
- Lifetime Warranty

Specifications: Cisco® Compatible SFP+ Twinax Direct Attach Cables (DAC)—Passive

Electrical Specifications:

Data Rate Supported:	Up to 11.1 Gb/s
Supply Voltage:	Min—3.135V Max—3.465V
Power Supply Current:	80mA (Max)
Total Power Consumption:	0.5W (Max)
Differential Input Voltage Swing (V DIFF):	Min—100 mVp-p Max—1800 mVp-p
Differential Output Voltage Swing (V DIFF):	600 mVp-p (Max)
Data Output Rise Time/Fall Time (Tr, Tf):	120 ps (Max)
Differential Impedance:	100±5 Ohms

Physical Specifications:

Operating Temperature:	-20°C to 70°C; 35-60% RH (Non-Condensing)
Storage Temperature:	-40°C to 85°C; 25-70% RH (Non-Condensing)
Approvals:	CE
Warranty:	Lifetime

Conductor (2 Pair):

Conductor:	30AWG (1/0.010TC)
Shield:	AL Mylar Wrap Braid, 16/4/0.10TC 85% Coverage
Drain:	30AWG

Conductor (1):


Conductor:	30AWG (1/0.010TC)
------------	-------------------

Overall Cable

Jacket:	PVC
OD:	4.37±0.1



Specifications: Cisco® Compatible SFP+ Twinax Direct Attach Cables (DAC)—Passive

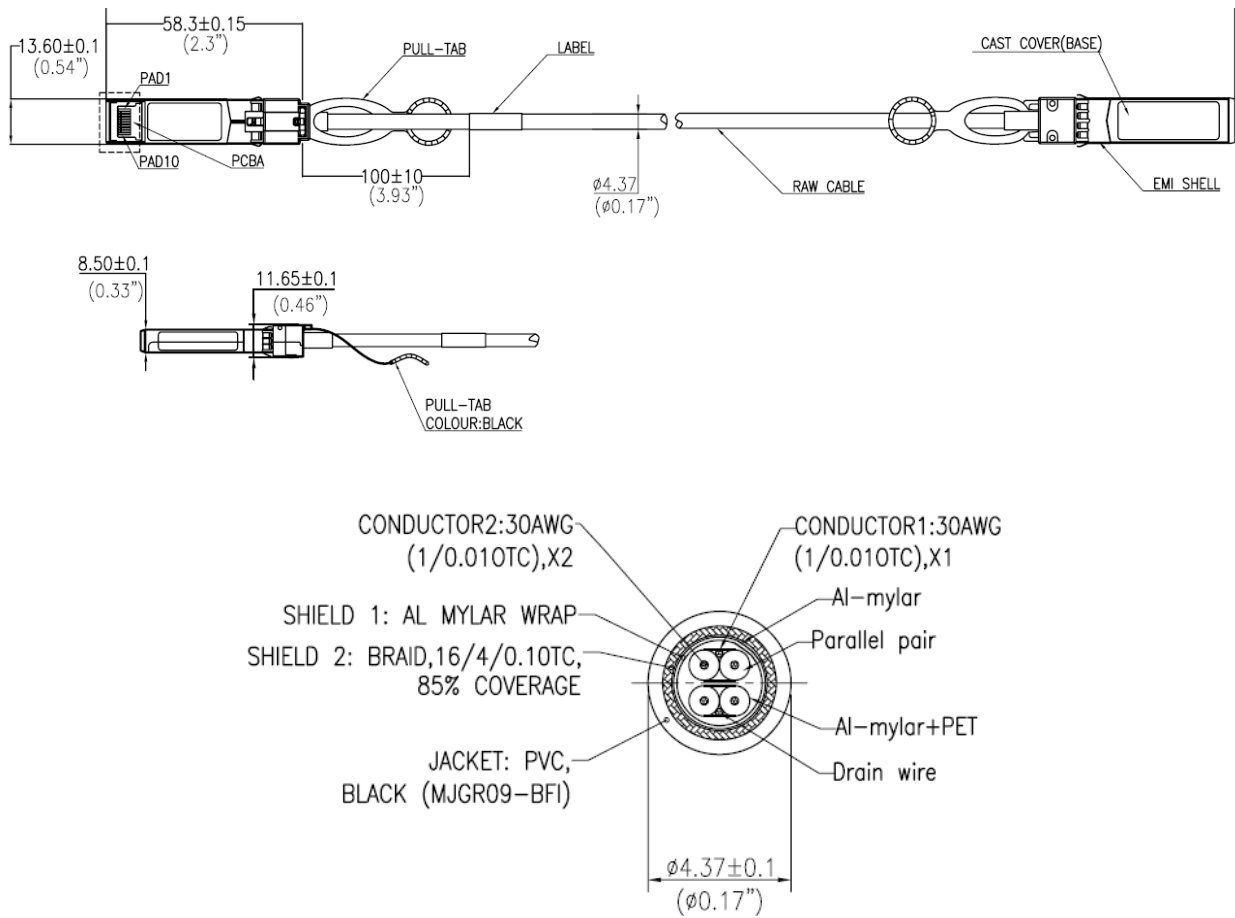

Part Number	Description	Weight (lbs)
00988	1m Cisco[R] Compatible SFP+ Twinax Copper Direct Attach Cable, Passive - SFP-H10GB-CU1M-C2G	0.201
00989	2m Cisco[R] Compatible SFP+ Twinax Copper Direct Attach Cable, Passive - SFP-H10GB-CU2M-C2G	0.263
00990	3m Cisco[R] Compatible SFP+ Twinax Copper Direct Attach Cable, Passive - SFP-H10GB-CU3M-C2G	0.315