

SPECIFICATION SHEET



RapidRun HDMI, VGA, Stereo Audio + USB Pass Through Single Gang Wall plate

- Compatible with standard single gang wall boxes
- Supports full 1080p, 4k, and 3D HDMI features
- Utilizes fiber cabling, so it is resistant to EMI/RFI interference
- Powered at the display side (RX) with USB
- Supports VGA video and Stereo Audio signals over a RapidRun Multi-format Runner
- USB pass through offers connectivity to interactive whiteboards or other peripheral devices
- Lifetime Warranty

RapidRun HDMI, VGA, Stereo Audio + USB Pass Through Single Gang Wall plate

Electrical Specifications:

Resolutions Supported:	4k x 2k 60Hz, 4k x 2k 30Hz, 1080p, 720p, 480p
HDMI Features Supported:	Ethernet Return Channel, HDMI High Speed, HDCP, EDID, CEC, Audio Return Channel
Power Consumption:	Max 5V @ 135mA
Idle:	5V @ 125mA
Normal Operation:	5V @ 128mA

Physical Specifications:

Color Designation:	Platinum
Temperature Rating:	0°C ~ 70°C
Humidity:	0% ~ 90% RH
Bend Radius:	5mm
Compliance:	CE, FCC, RoHS2

Multiformat Pigtail:

Pigtail Length:	5.12 inches
Color Designation:	Orange
Connectors:	VGA + 3.5mm female, 15pin DIN male
Conductor (Coax)	
Wire gauge:	28AWG (7/0.127)TC
Insulation:	FM-PE ID: 1.6±0.07
Shield:	Spiral, 90% Min Coverage
Jacket Color	Red, Green, Blue
Conductor (1 Pair)	
Wire gauge:	24 AWG(7/0.20)TC
Insulation:	SR-PVC. ID: 1.1±0.05
Shield 1:	AL Face Inside
Shield 2:	Hot-Melt Al Foil Wrap
Drain:	24 AWG (7/0.20)TC
Jacket color:	Brown, Brown/White
Conductor (x7)	
Wire gauge:	24 AWG (11/0.16)TC
Jacket Color:	Black, Red, Blue, Orange, Gray, Yellow, Green




USB Pigtail:

Pigtail Length:	4.33 inches
Jacket:	Black PVC
Shield 1:	AL Foil Wrap
Shield 2:	Braid (16*5/0.10)TC
Drain:	28 AWG (7/0.127)TC
Connectors:	USB B Female, USB A Female
Conductor (1 Pair)	
Wire gauge:	28AWG (7/0.127)TC, x2
Insulation:	HD-PE, ID: 0.90±0.05mm (Green White)
Conductor (x2)	
Wire gauge:	24 AWG (7/0.2)TC
Insulation:	SR-PVC, ID 1.1±0.05mm (Red, Black)


Optical Pigtail:

Pigtail Length:	3.85 inches
Jacket:	Black PVC
Flexible PCB:	x2
Connectors:	HDMI Female, 20pin MDP

RapidRun HDMI, VGA, Stereo Audio + USB Pass Through Single Gang Wall plate

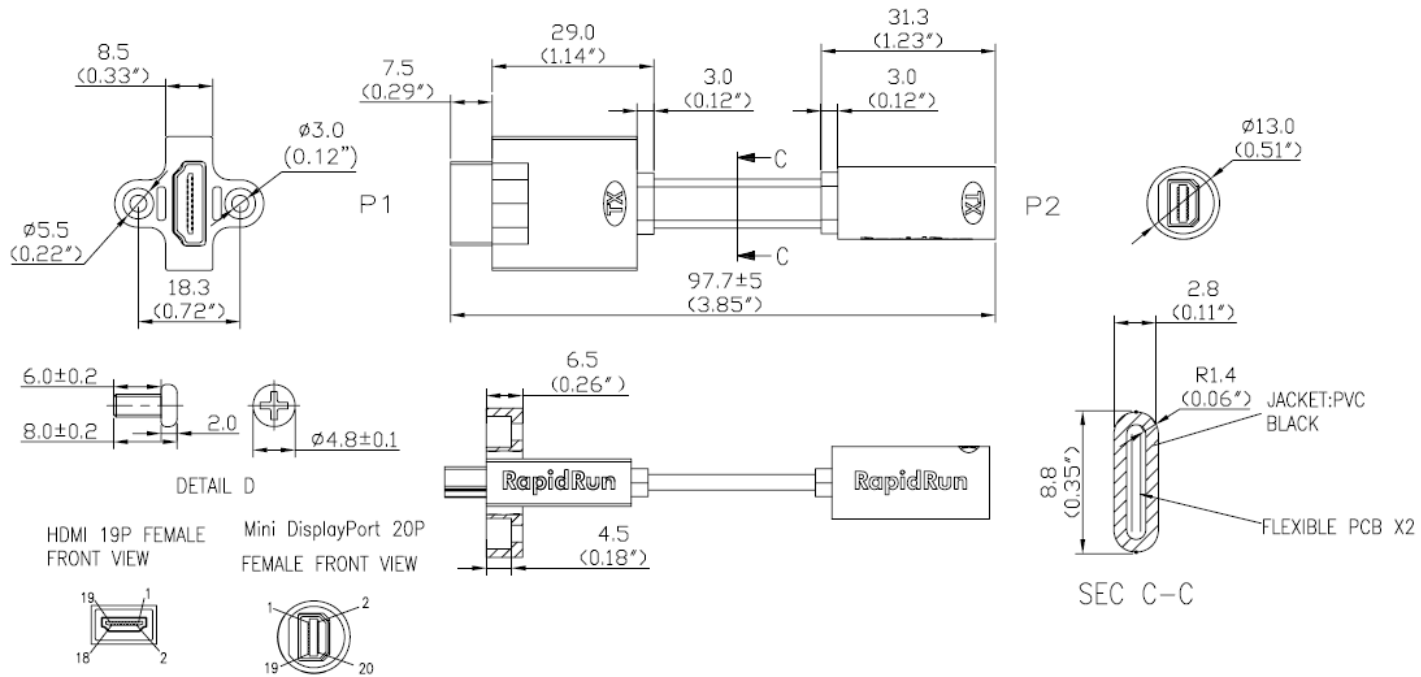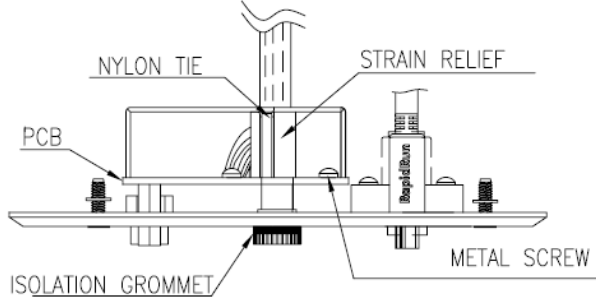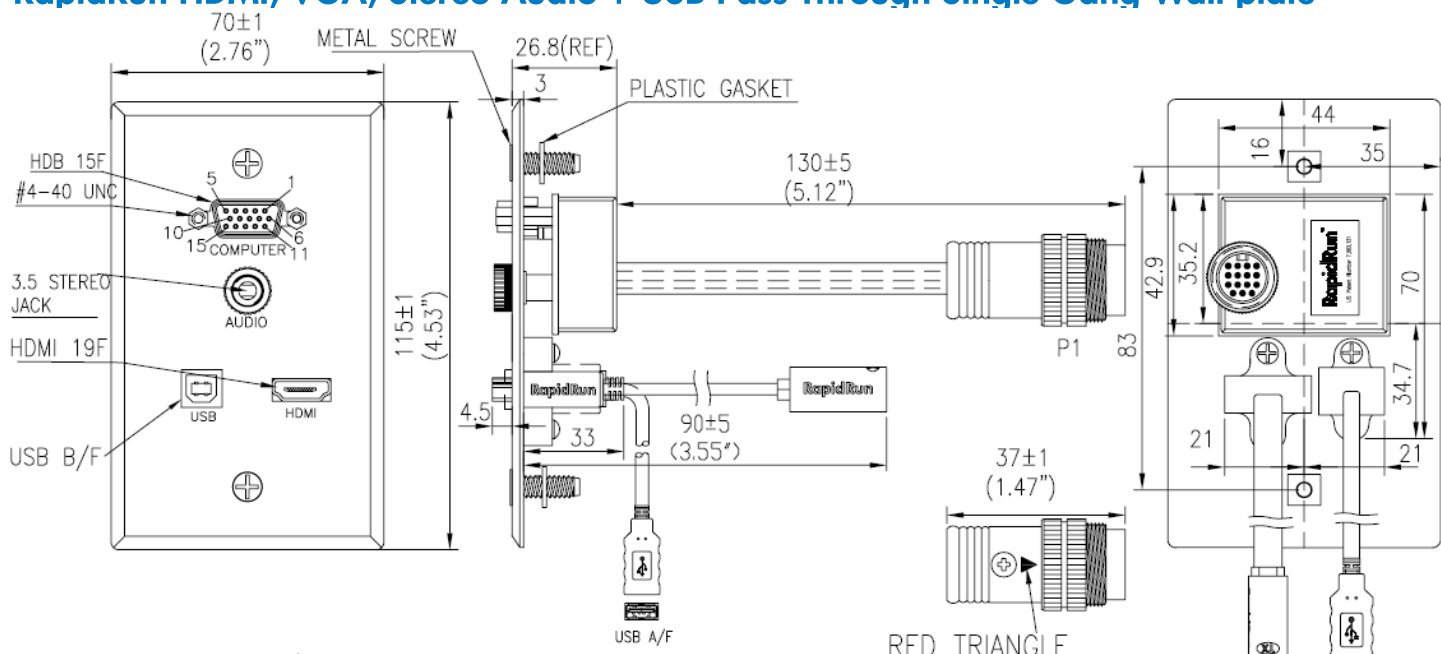

RapidRun HDMI, VGA, Stereo Audio + USB Pass Through Single Gang Wall plate

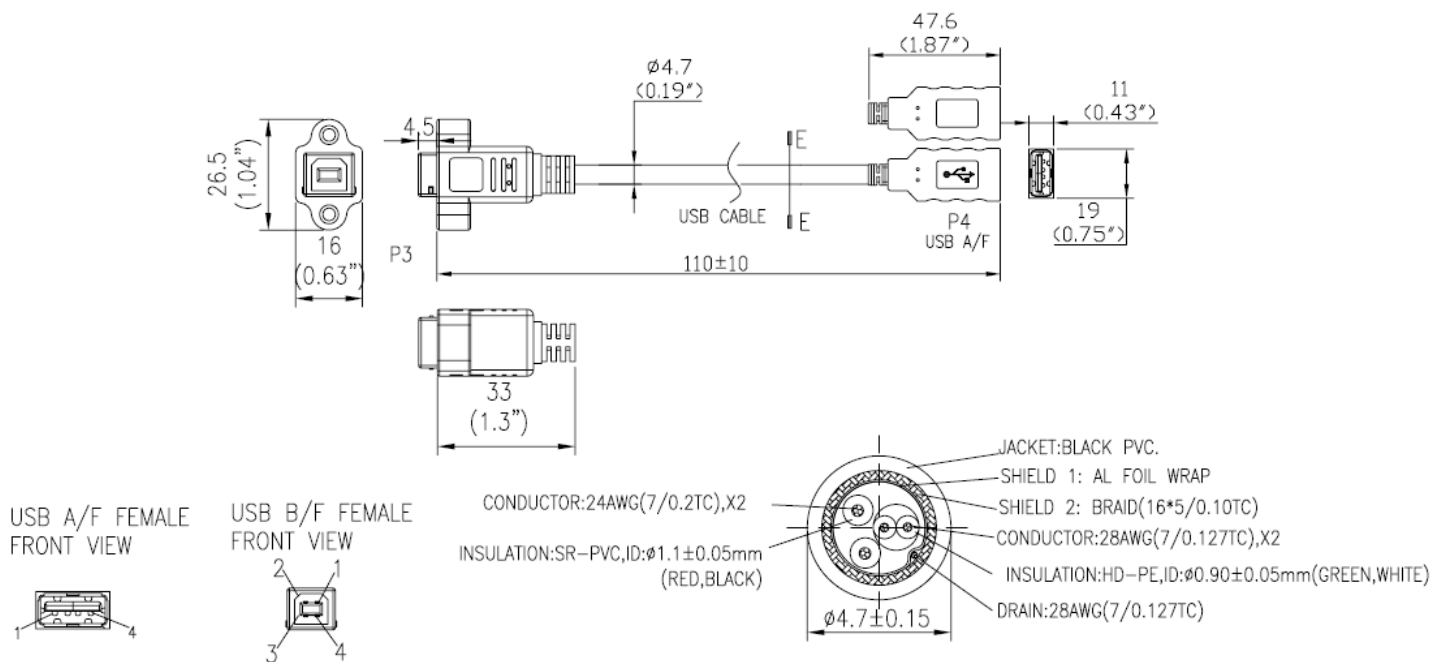

Part Number	Description	Weight (lbs)
60170	RapidRun HDMI, VGA, Stereo Audio + USB Pass Through Single Gang Wall plate	.435



CABLES TO GO

Cables To Go
3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.287.2843
www.c2g.com

Follow Us

