




C2G
16.4ft (5m) MTP 10Gb 50/125 OM3 Multimode PVC Fiber Optic Cable - Aqua
Part No. CG-31418

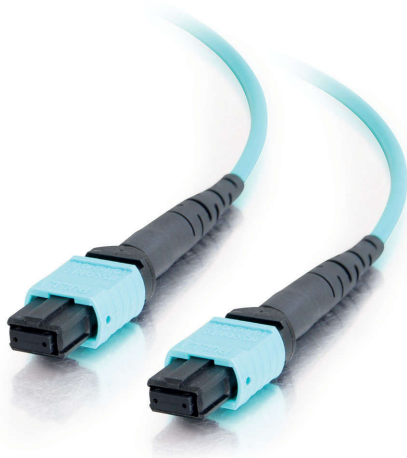

Make MTP/MPO your choice for high density fiber networks; it's specifically designed for fast ethernet, fiber channel, ATM and gigabit ethernet applications. Save time and money with MTP/MPO's increased ease of installation - simply pull one cable rather than twelve. Each MTP/MPO fiber assembly consists of twelve laser-optimized, 10G 50/125 multimode fibers under one PVC (OFNR-rated) jacket.

With our MTP/MPO, it's possible to run a single cable that automatically terminates twelve fibers in one easy plug-in. Plus, the small form factor of an MTP/MPO connector provides a higher port density. With its push-pull release mechanism, the MTP/MPO connector is easy to engage and disengage. Plus, its latch design prevents the plug from snagging when jumper cables are being routed. Straight-through pinning; immune to electrical interference.

Please Note: MTP/MPO is a registered trademark of US Conec Ltd. Attenuation testing performed in accordance with EIA/TIA-455-171A.

Features & Benefits

Designed to support gigabit ethernet, fibre channel, ATM, or any application that requires high speed data transfer

Ease of installation - simply pull one cable rather than twelve

Small form factor provides a higher port density

Push-pull release mechanism and latch design for easy use

Specifications

General Info

Product Line	C2G	Color	Aqua
UPC Number	757120314189	Country Of Origin	Hong Kong
Application Sector	Commercial, Industrial	Warranty Type	Lifetime
Type	Cable		

Dimensions

Product Length US	16.4 FT	Cable Length	16.4 ft
-------------------	---------	--------------	---------

Technical Information

Fiber Optic Cable Type	MTP, Multimode, OM3	Jacket Material	PVC (Polyvinyl Chloride)
Jacket Application	Riser Rated	Bend Radius	45 mm

Cable Type	Fiber Optic	Jacket Rating	FT4 Rated, OFNR Rated
Cable Diameter	3 mm	Data Transfer Rate	10 Gbps
Connector 2	MPO Female	Connector 1	MPO Female
Fiber Size	50/125		
